
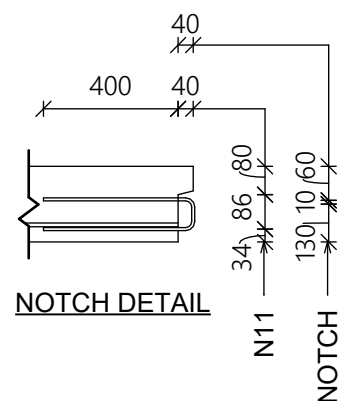
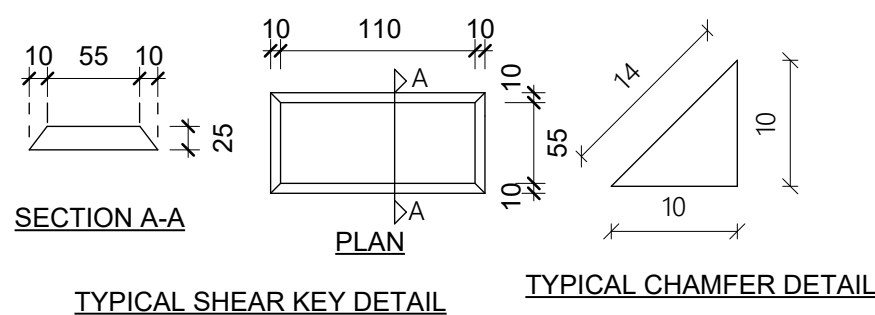
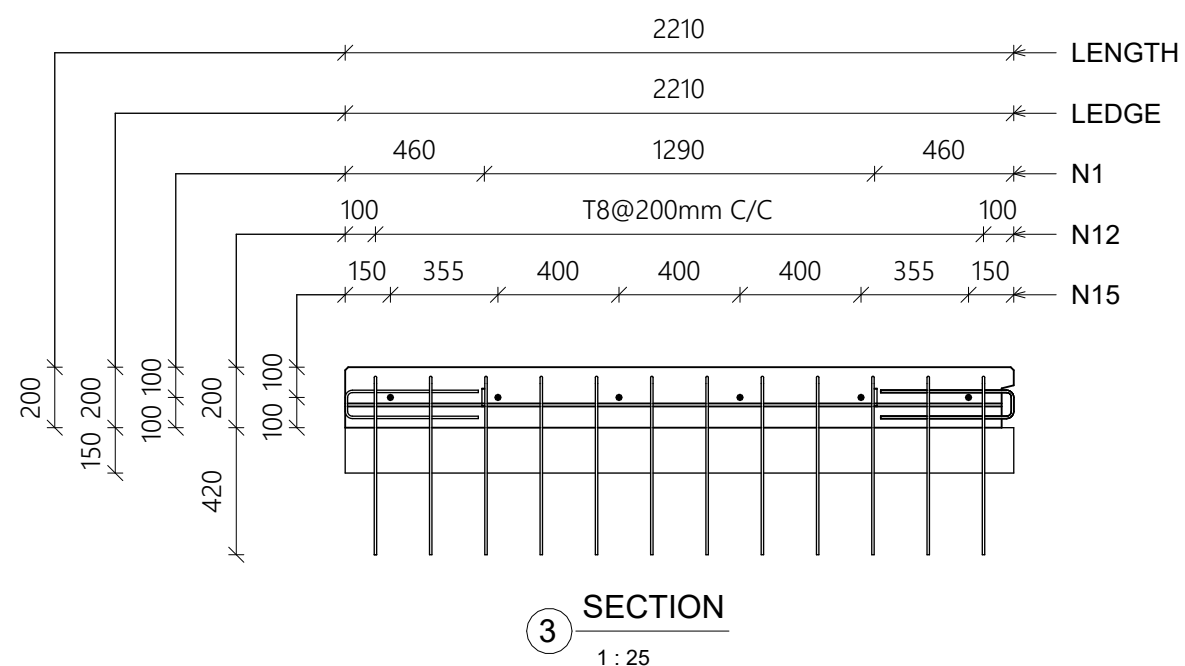
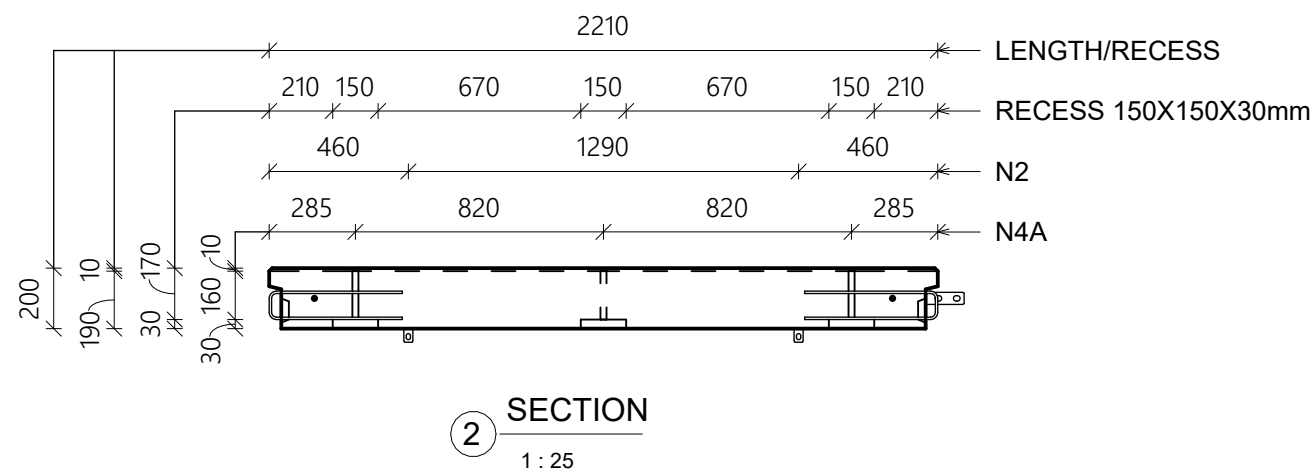






Material Takeoff	
Volume	Weight
3.98 m ³	9939.48 kg

Insert Schedule		
Ref No.	Type	Count
N1	RR-SA-7.5-260	2
N2	RR-SA-2.5-150	8
N3	RR-SA-4.0-180	4
N4	60 mm dowel tube	10
N4A	20Ø SLEEVE	3

Dowel Bar Schedule		
Ref.No	Bar Diameter	Count
N15	20 mm	6

U Bar&Projecting Bar Schedule		
Ref.No	Bar Diameter	Count
N11	8 mm	89
N12	8 mm	12

NOTE: FOR REINFORCEMENT DETAILS
REFER PW-GF-02(R)

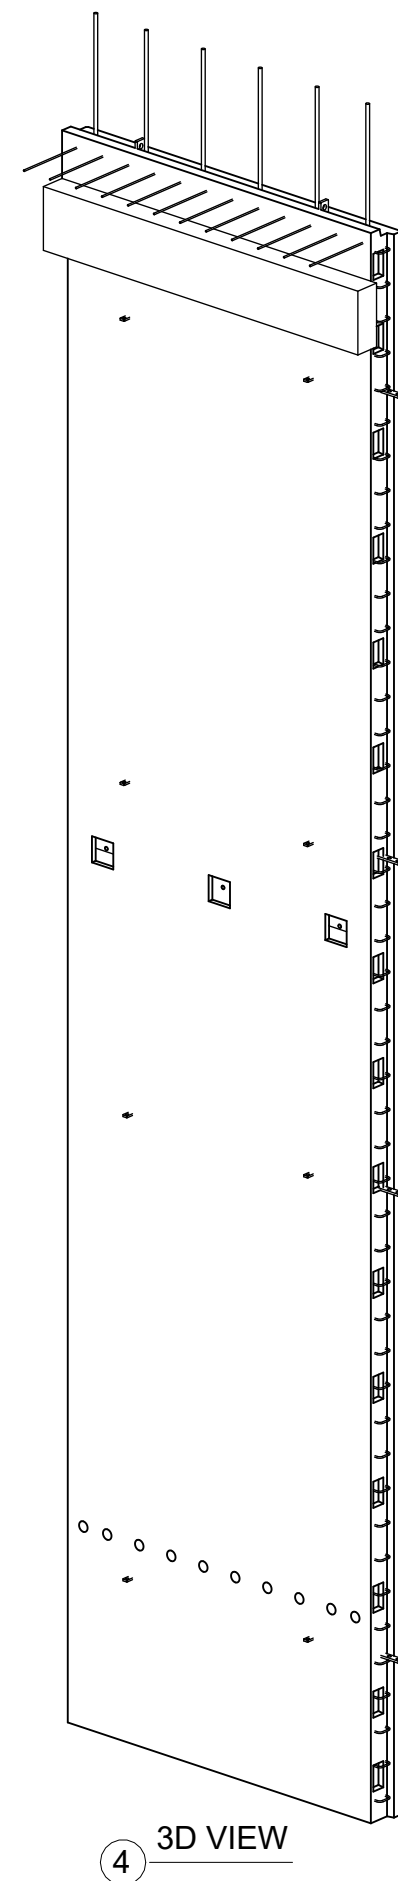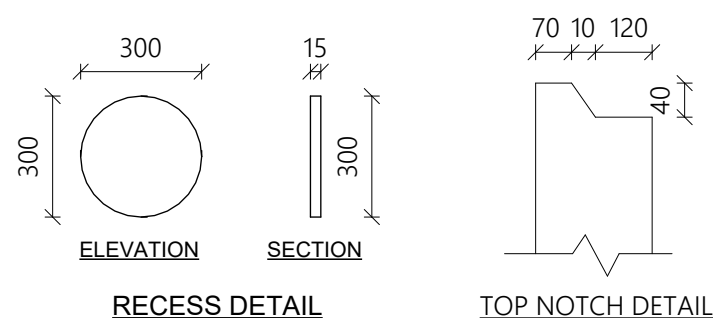

PROJECT -:
MF FACTORY

GENERAL NOTES:

GRADE OF CONCRETE	- M40
GRADE OF STEEL	- Fe500
STRIPPING STRENGTH	- M20

COVER

WALL	- 30mm
CORBEL	- 25mm

ALL DIMENSIONS ARE IN MM

LEGENDS:

ERECTION MARK	-	
MOULD FACE	-	

CONTRACTOR -:

VME Precast Products

 Arihant Esta, 2g2, 2nd floor,
No.370, Church Road, Mogappair East,
Chennai-600037.
Tel:+91- 98400 - 41400 / 90802 - 22066

STRUCTURAL CONSULTANT :-

ES STRUCTURAL CONSULTANT
 B167, 12th cross street, Jawahar Nagar,
 Palayamkottai, Tirunelveli-627007
 Cell No: +91 9865803764

0	02-08-25	FOR APPROVAL	PK	PRC
Rev	Date	Description	Chkd	Appd.

REVISION SCHEDULE

DRAWING TITLE -:

PW-GF-04-MOULD DRAWING

JOB NO. : ESP24075	DRAWN BY:- IH
ELEMENT NO. : PW-GF-04	SHEET SIZE:- A3
DWG. NO. : PW-GF-04(M2)	REV.NO:- 0
SCALE : As indicated	LEVEL. : GF