
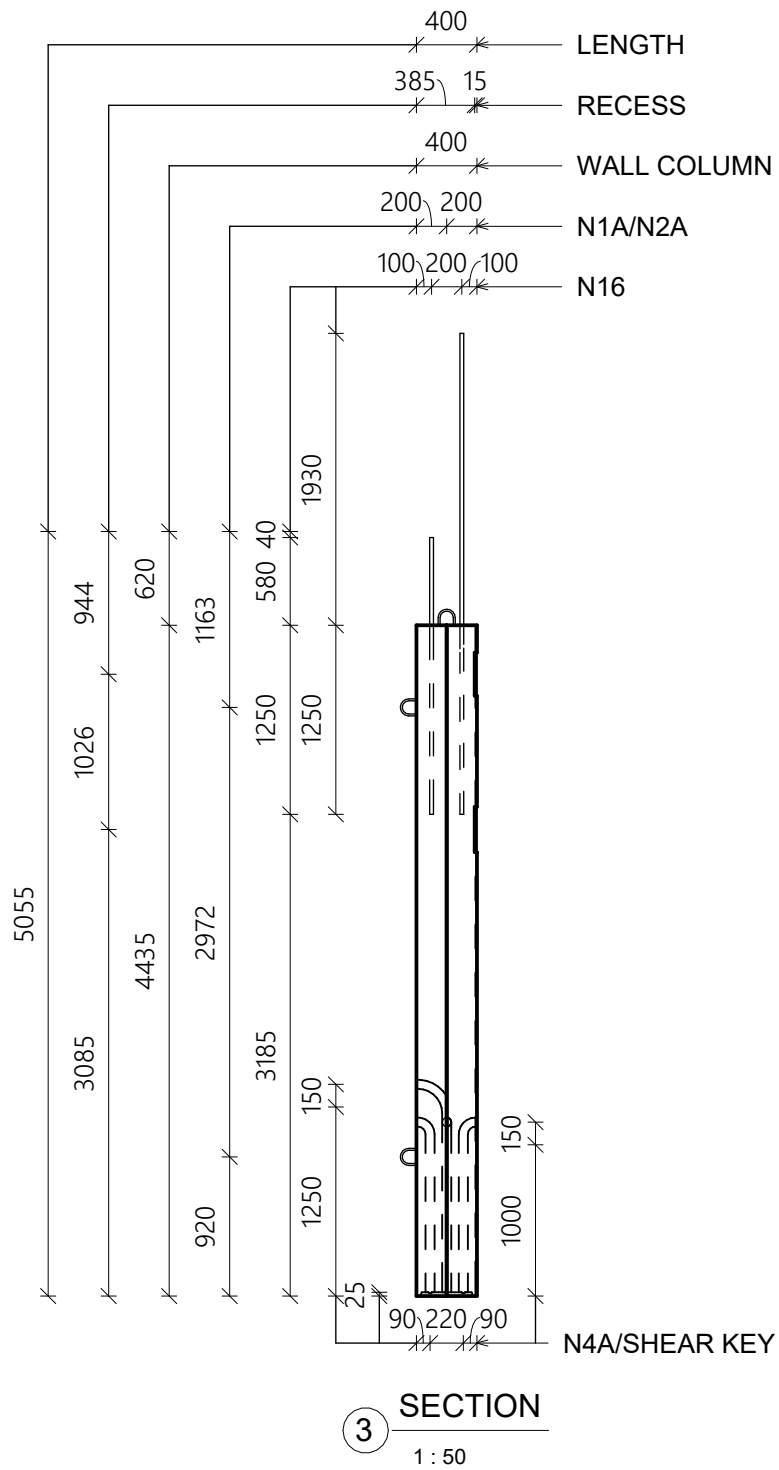


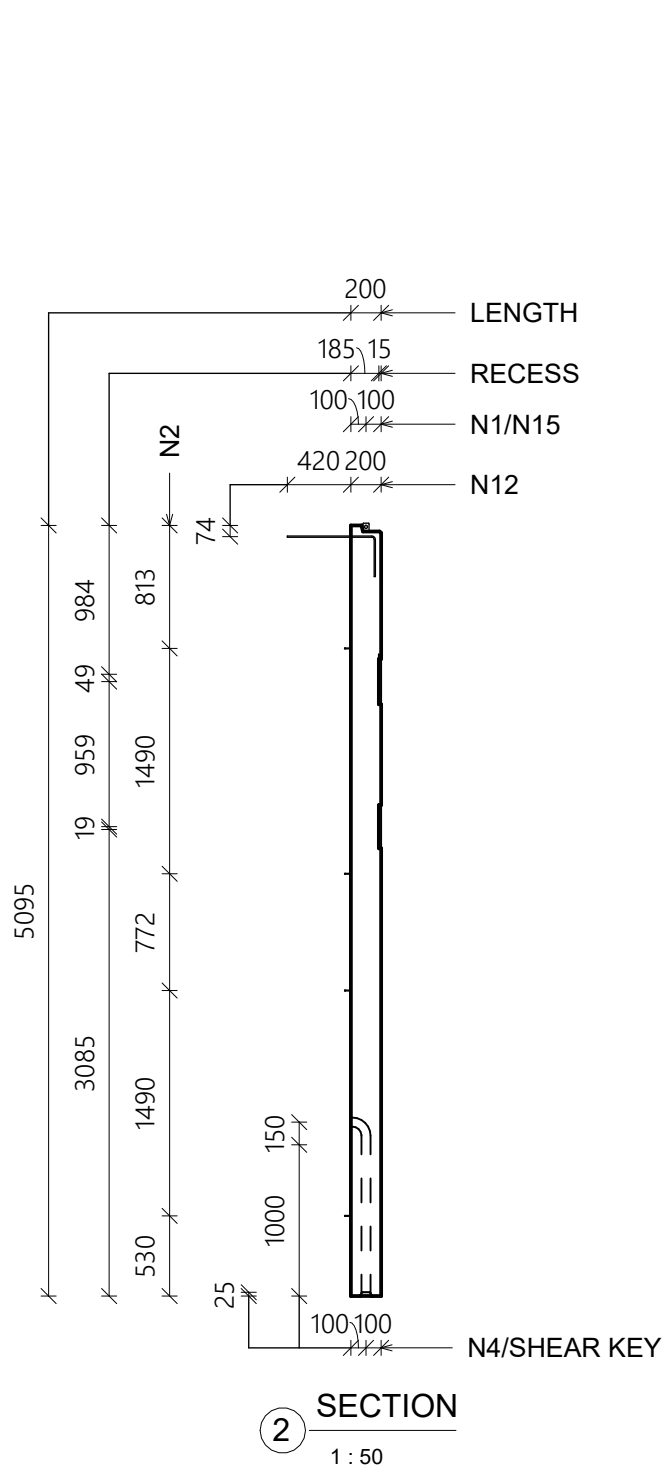

Dowel Bar Schedule		
Ref.No	Bar Diameter	Quantity
N14	16 mm	10
N15	20 mm	2
N16	25 mm	4

Insert Schedule		
Ref.No	Type	Count
N1	RR-SA-3.0-200	2
N1A	12.9Ø Lifting insert	2
N2	RR-SA-0.7-110	8
N2A	12.9Ø Lifting insert	4
N3	RR-SA-2.5-250	4
N4	60 mm dowel tube	3
N4A	60 mm dowel tube	16

ProjectingI Bar Schedule		
Ref.No	Bar Diameter	Quantity
N12	8 mm	4
N13	10 mm	2

U Bar Schedule		
Ref.No	Bar Diameter	Quantity
N11	8 mm	23

Weight Schedule	
Volume	Weight
2.02 m³	5053.69 kg

PROJECT -:
MF FACTORY

GENERAL NOTES:

- GRADE OF CONCRETE - M40
GRADE OF STEEL - Fe500
STRIPPING STRENGTH - M20

COVER

- WALL - 30mm
CORBEL - 25mm

ALL DIMENSIONS ARE IN MM

LEGENDS:

- ERECTION MARK - 
MOULD FACE - 

CONTRACTOR -:

VME Precast Products
 Arihant Esta, 2g2, 2nd floor,
No.370, Church Road, Mogappair East,
Chennai-600037.
Tel:+91- 98400 - 41400 / 90802 - 22066

STRUCTURAL CONSULTANT -:

ES STRUCTURAL CONSULTANT
 B167, 12th cross street, Jawahar Nagar,
Palayamkottai, Tirunelveli-627007
Cell No: +91 9865803764

0	23-07-25	FOR APPROVAL	PK	PRC
Rev	Date	Description	Chkd	Appd.

REVISION SCHEDULE

DRAWING TITLE -:

PW-GF-05-MOULD DRAWING

JOB NO. : ESP24075	DRAWN BY:- IH
ELEMENT NO. : PW-GF-05	SHEET SIZE:- A3
DWG. NO. : PW-GF-05(M2)	REV.NO:- 0
SCALE : 1 : 50	LEVEL. :