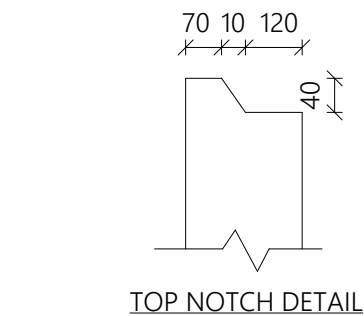
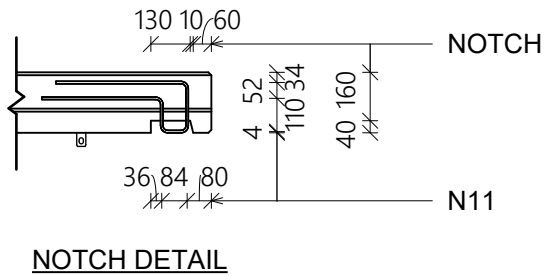
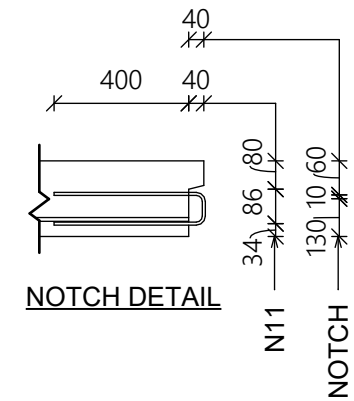
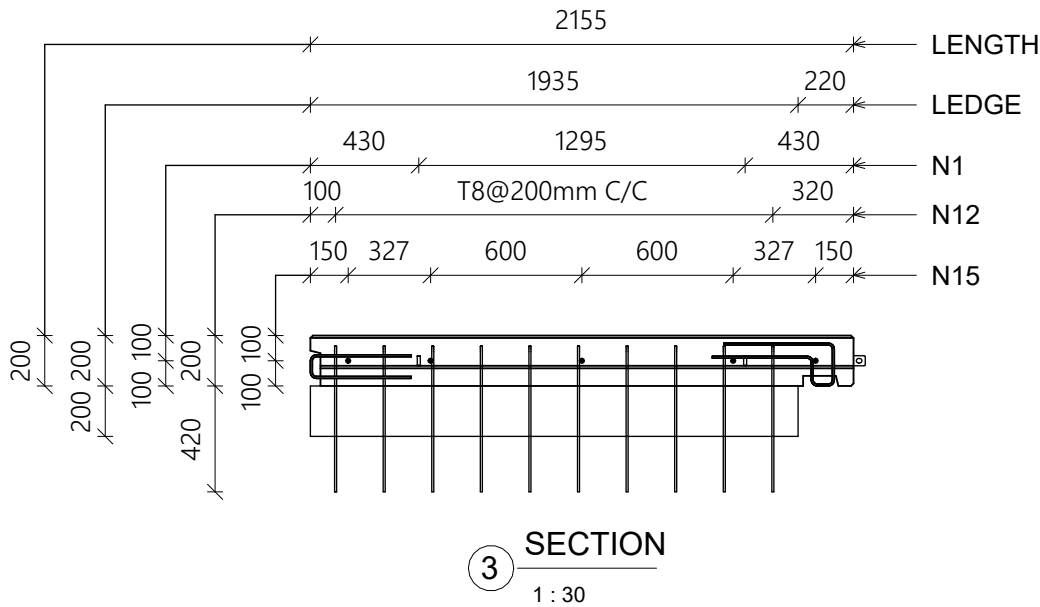
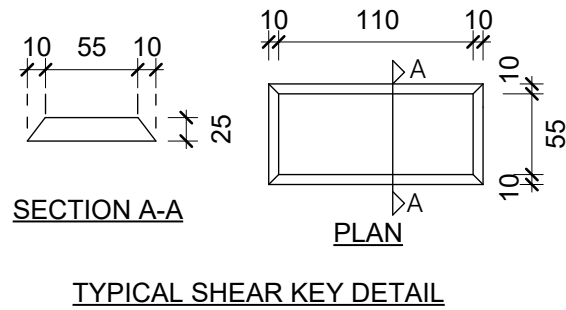
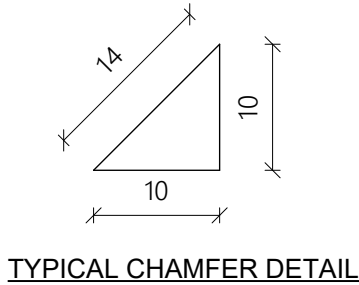
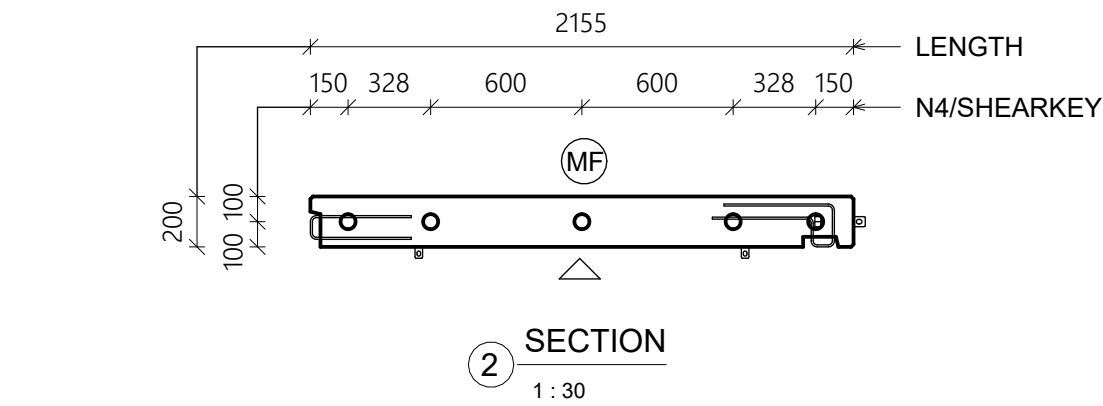



Weight Schedule	
Volume	Weight
2.20 m ³	5490.29 kg

Insert Schedule		
Ref No.	Type	Count
N1	RR-SA-4.0-180	2
N2	RR-SA-2.5-200	8
N3	RR-SA-3.0-200	4
N4	60 mm dowel tube	5

U Bar Schedule		
Ref.No	Bar Diameter	Count
N11	8 mm	52

Projecting Bar Schedule		
Ref.No	Bar Diameter	Count
N12	8 mm	10

Dowel Bar Schedule		
Ref.No	Bar Diameter	Count
N15	20 mm	5

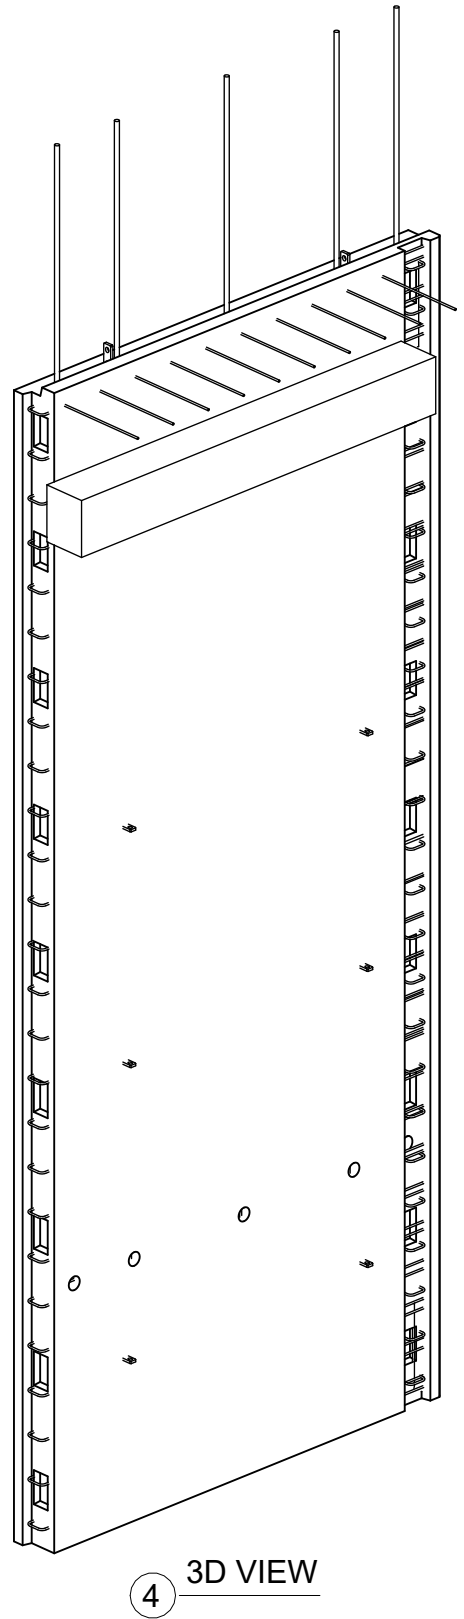

PROJECT -: MF FACTORY

GENERAL NOTES:

GRADE OF CONCRETE	- M40
GRADE OF STEEL	- Fe500
STRIPPING STRENGTH	- M20

COVER

WALL	- 30mm
CORBEL	- 25mm

ALL DIMENSIONS ARE IN MM

LEGENDS:

ERECTION MARK	-	
MOULD FACE	-	

CONTRACTOR -:

VME Precast Products

 Arihant Esta, 2g2, 2nd floor,
No.370, Church Road, Mogappair East,
Chennai-600037.
Tel:+91- 98400 - 41400 / 90802 - 22066

STRUCTURAL CONSULTANT -:

 **ES STRUCTURAL CONSULTANT**
B167, 12th cross street, Jawahar Nagar,
Palayamkottai, Tirunelveli-627007
Cell No: +91 9865803764

1	26-05-25	FOR APPROVAL	PK	PRC
0	22-04-25	FOR APPROVAL	PK	PRC
Rev	Date	Description	Chkd	Appd.

REVISION SCHEDULE

DRAWING TITLE -:

PW-GF-07-MOULD DRAWING

JOB NO. : ESP24075	DRAWN BY:- AR
ELEMENT NO. : PW-GF-07	SHEET SIZE:- A3
DWG. NO. : PW-GF-07(M2)	REV.NO:- 1
SCALE : As indicated	LEVEL. : GF