
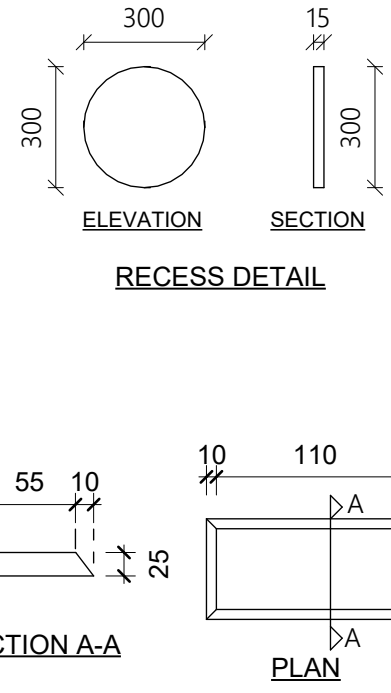
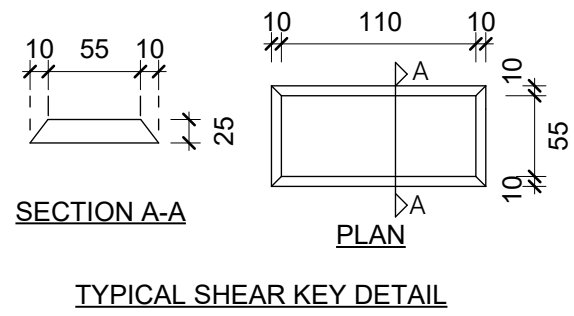
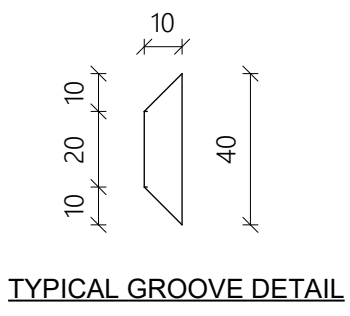
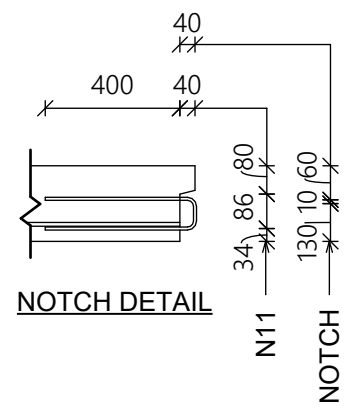
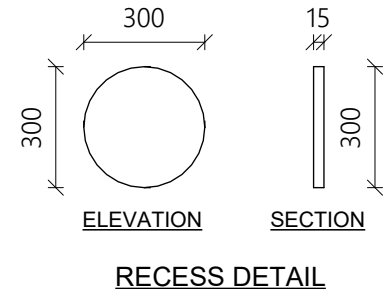
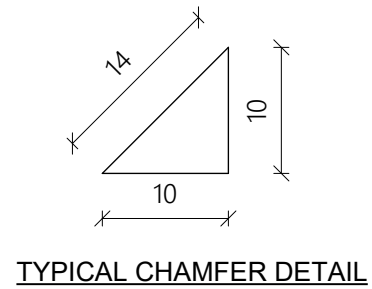
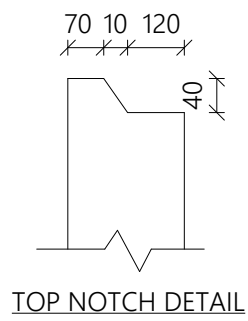
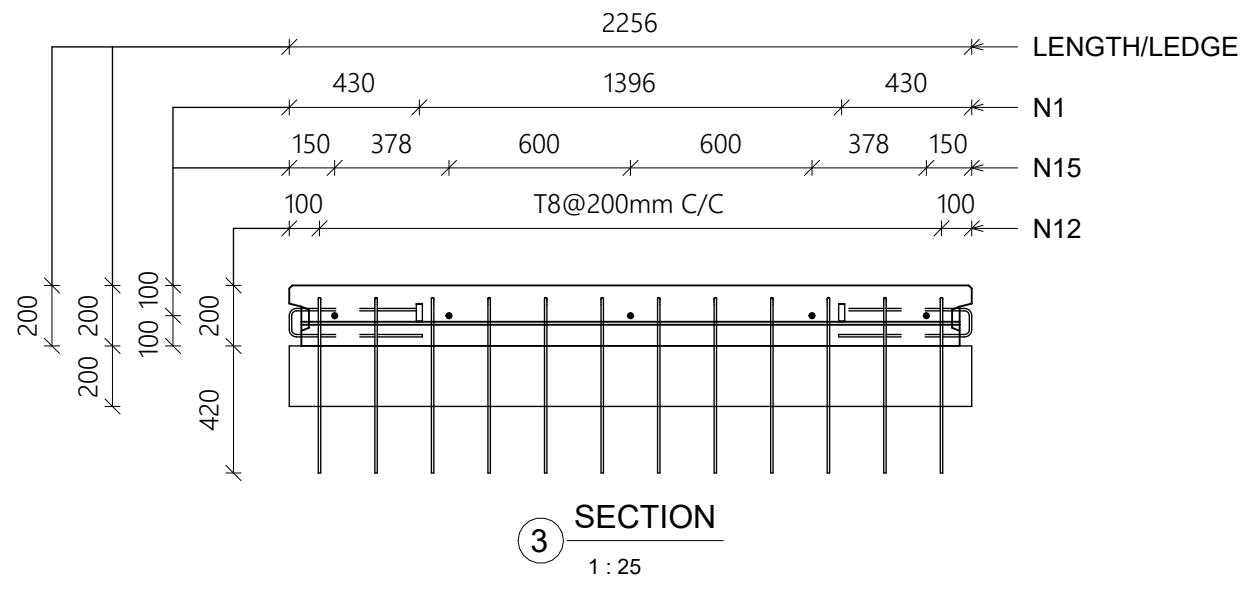


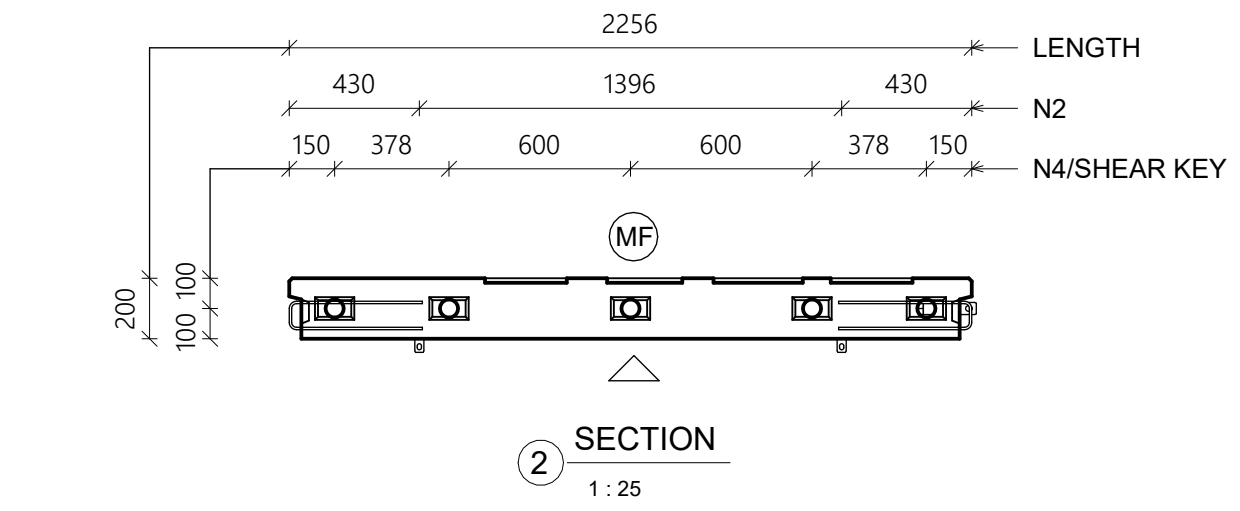

SECTION A-A

PLAN

TYPICAL SHEAR KEY DETAIL


Weight Schedule	
Volume	Weight
4.07 m ³	10181.31 kg

Insert Schedule		
Ref No.	Type	Count
N1	RR-SA-10.0-300	2
N2	RR-SA-2.5-200	8
N3	RR-SA-3.0-200	4
N4	60 mm dowel tube	5

U Bar & Projecting Bar Schedule		
Ref.No	Bar Diameter	Quantity
N11	8 mm	92
N12	8 mm	12

Dowel Bar Schedule		
Ref.No	Bar Diameter	Count
N15	20 mm	5

NOTE: FOR REINFORCEMENT DETAILS REFER PW-GF-30

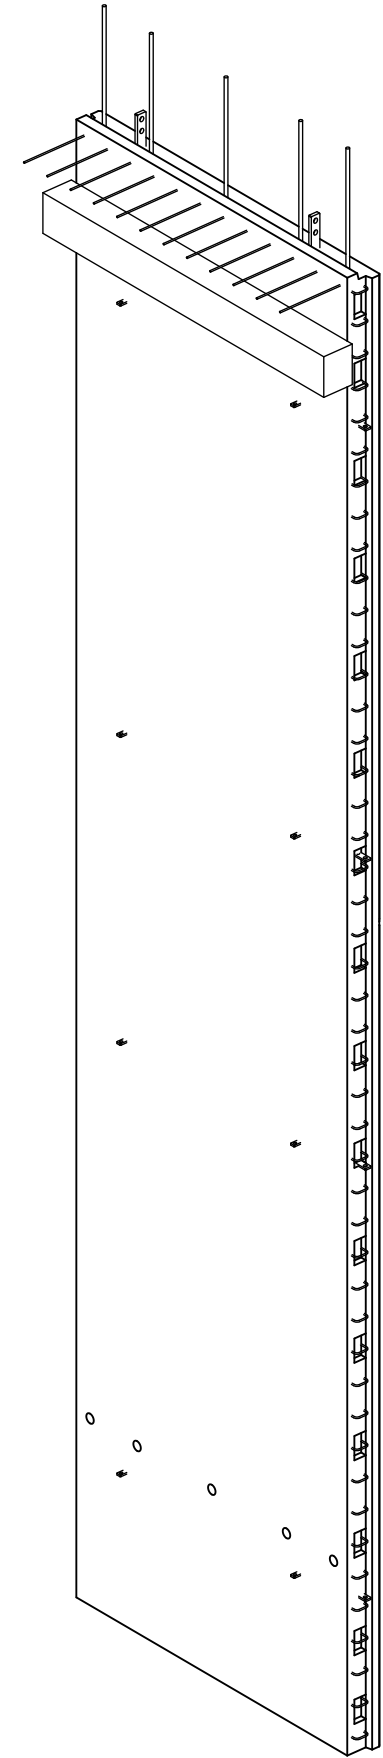

4 3D VIEW

PROJECT -:

MF FACTORY

GENERAL NOTES:

GRADE OF CONCRETE - M40

GRADE OF STEEL - Fe500

STRIPPING STRENGTH - M20

COVER

WALL - 30mm

CORBEL - 25mm

ALL DIMENSIONS ARE IN MM

LEGENDS:

ERECTION MARK -

MOULD FACE -

CONTRACTOR -:

VME Precast Products

Arihant Esta, 2g2, 2nd floor,
No.370, Church Road, Mogappair East,
Chennai-600037.
Tel:+91- 98400 - 41400 / 90802 - 22066

STRUCTURAL CONSULTANT -:

ES STRUCTURAL CONSULTANT

B167, 12th cross street, Jawahar Nagar,
Palayamkottai, Tirunelveli-627007
Cell No: +91 9865803764

1	26-05-25	FOR APPROVAL	PK	PRC
0	12-05-25	FOR APPROVAL	PK	PRC
Rev	Date	Description	Chkd	Appd.

REVISION SCHEDULE

DRAWING TITLE -:

PW-GF-10-MOULD DRAWING

JOB NO. : ESP24075	DRAWN BY:- AR
ELEMENT NO. : PW-GF-10	SHEET SIZE:- A3
DWG. NO. : PW-GF-10(M2)	REV.NO:- 1
SCALE : As indicated	LEVEL. : GF