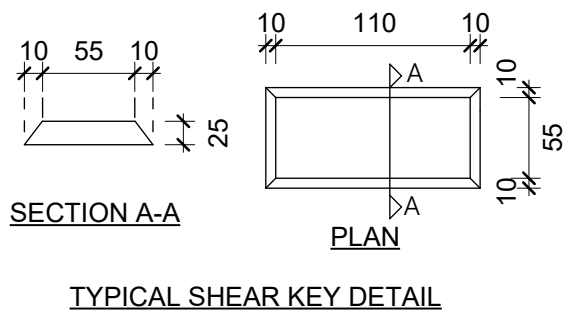
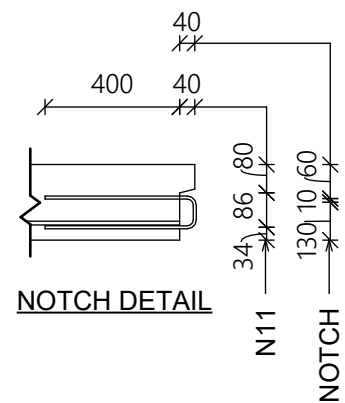
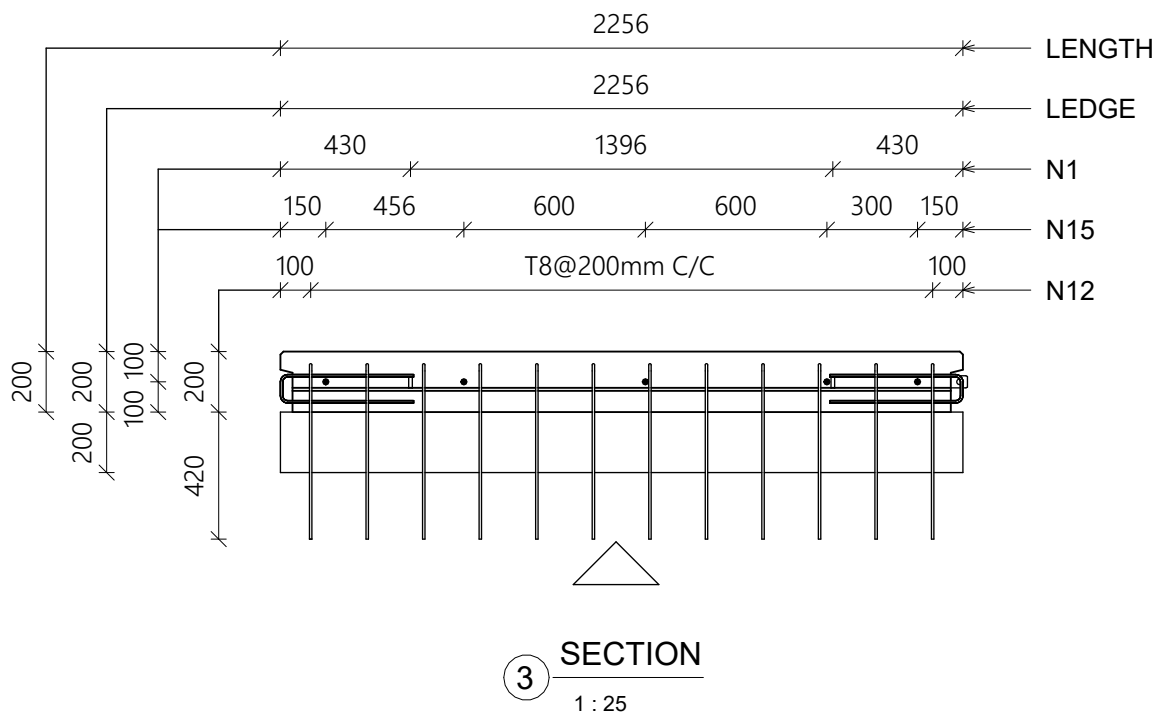
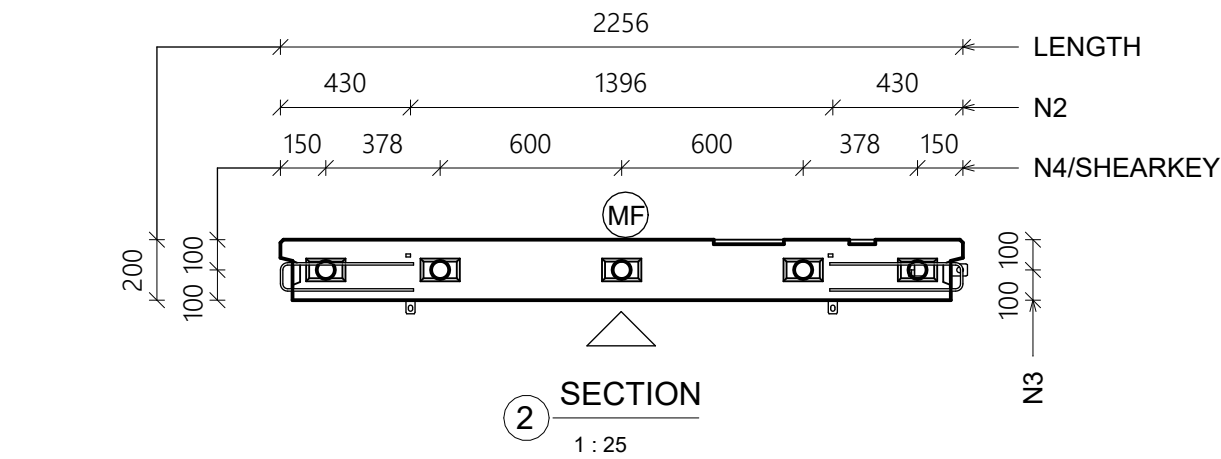


Material Takeoff	
Volume	Weight
4.07 m ³	10178.69 kg


Insert Schedule		
Ref No.	Type	Count
N1	RR-SA-4.0-180	2
N2	RR-SA-2.5-200	8
N3	RR-SA-3.0-200	4
N4	60 mm dowel tube	5

U Bar Schedule		
Ref.No	Bar Diameter	Count
N11	8 mm	92

Projecting Bar Schedule		
Ref.No	Bar Diameter	Count
N12	8 mm	12

Dowel Bar Schedule		
Ref.No	Bar Diameter	Count
N15	20 mm	5

NOTE: FOR REINFORCEMENT DETAILS REFER PW-GF-30

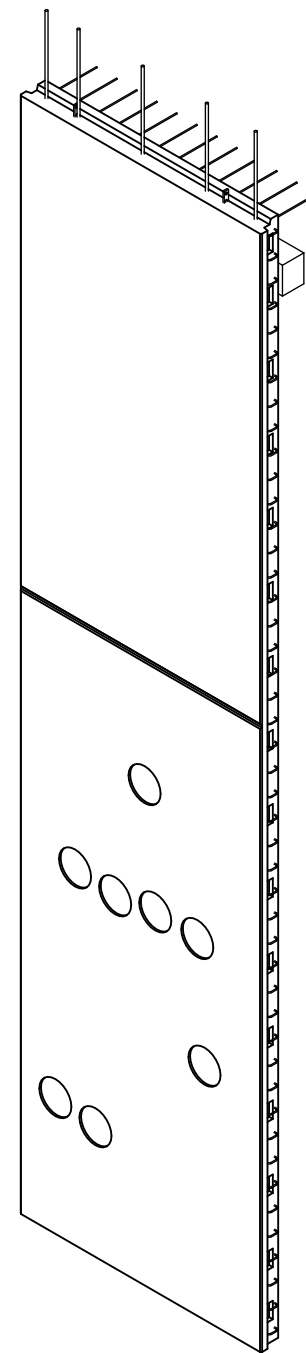

PROJECT -:
MF FACTORY

GENERAL NOTES:

GRADE OF CONCRETE - M40
GRADE OF STEEL - Fe500
STRIPPING STRENGTH - M20
COVER
WALL - 30mm
CORBEL - 25mm

ALL DIMENSIONS ARE IN MM

LEGENDS:
ERECTION MARK -
MOULD FACE -

CONTRACTOR -:
VME Precast Products

Arihant Esta, 2g2, 2nd floor,
No.370, Church Road, Mogappair East,
Chennai-600037.
Tel:+91- 98400 - 41400 / 90802 - 22066

STRUCTURAL CONSULTANT -:
ES STRUCTURAL CONSULTANT

B167, 12th cross street, Jawahar Nagar,
Palayamkottai, Tirunelveli-627007
Cell No: +91 9865803764

1	26-05-25	FOR APPROVAL	PK	PRC
0	21-04-25	FOR APPROVAL	PK	PRC
Rev	Date	Description	Chkd	Appd.

REVISION SCHEDULE				
-------------------	--	--	--	--

DRAWING TITLE -:	
PW-GF-12-MOULD DRAWING	
JOB NO. : ESP24075	DRAWN BY:- AR
ELEMENT NO. : PW-GF-12	SHEET SIZE:- A3
DWG. NO. : PW-GF-12(M2)	REV.NO:- 1
SCALE : As indicated	LEVEL. : GF