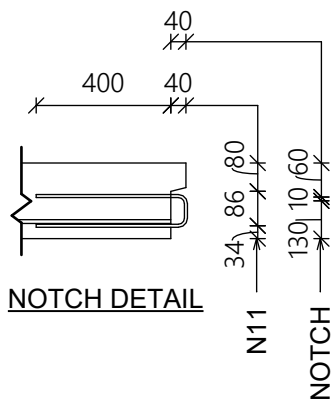
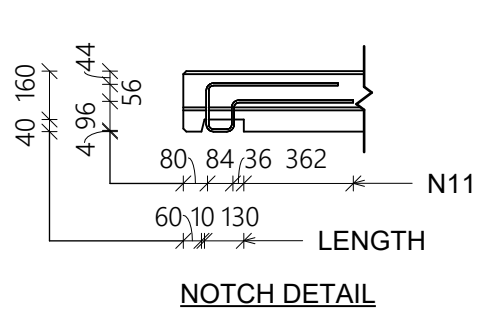
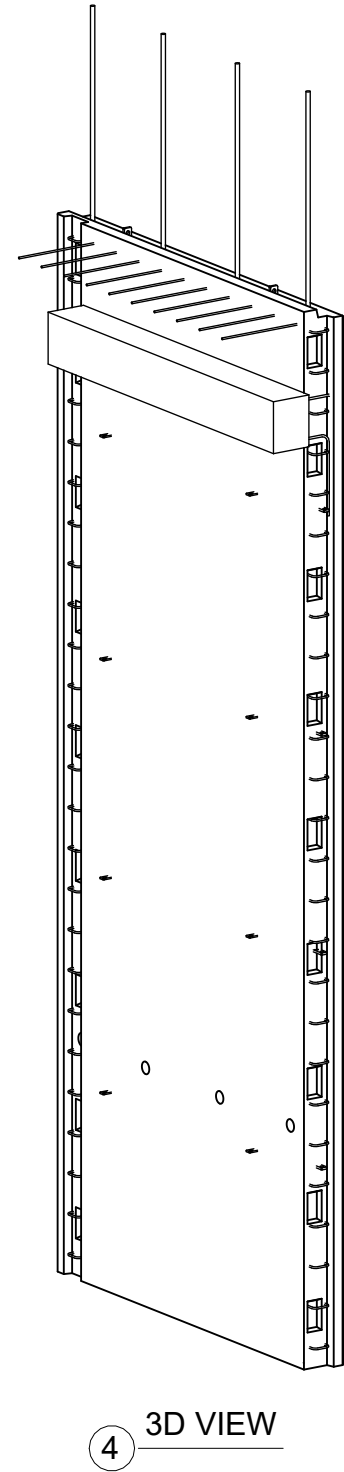

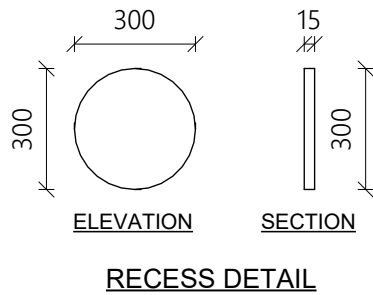
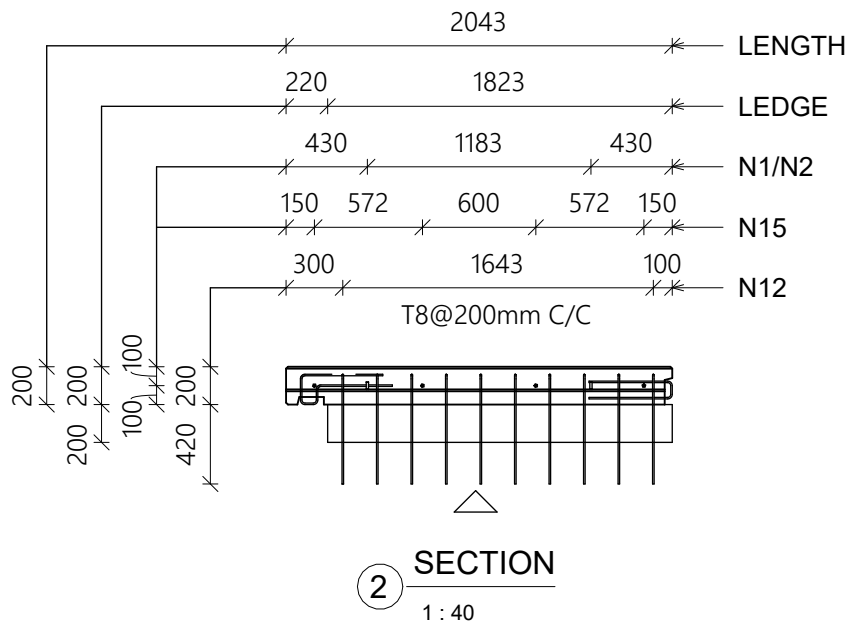
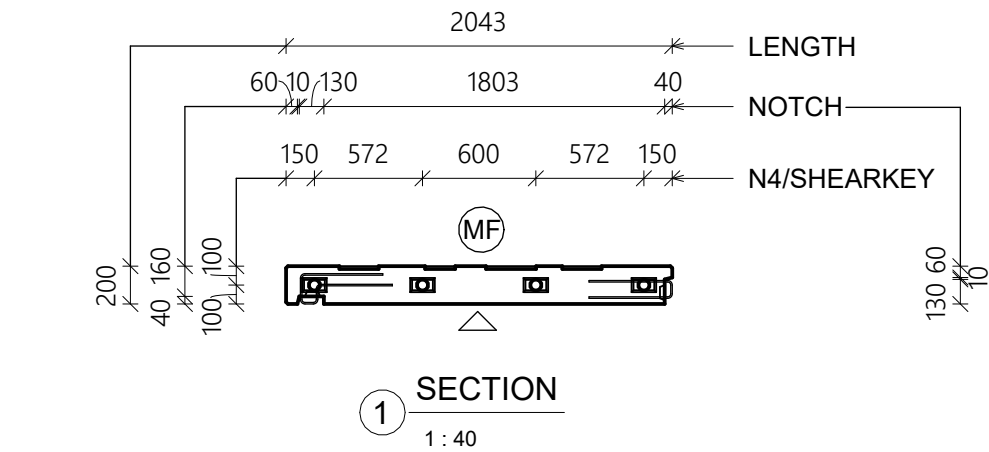


Weight Schedule	
Volume	Weight
2.08 m ³	5198.89 kg

Insert Schedule		
Ref No.	Type	Count
N1	RR-SA-4.0-180	2
N2	RR-SA-1.4-160	8
N3	RR-SA-2.5-250	4
N4	60 mm dowel tube	4

U-Bar & Dowel Bar Schedule		
Ref.No	Bar Diameter	Count
N11	8 mm	52
N15	20 mm	4

Projecting Bar Schedule		
Ref.No	Bar Diameter	Count
N12	8 mm	10

NOTE: FOR REINFORCEMENT DETAILS REFER PW-GF-07

PROJECT -: MF FACTORY

GENERAL NOTES:

GRADE OF CONCRETE - M40
GRADE OF STEEL - Fe500
STRIPPING STRENGTH - M20

COVER

WALL - 30mm
CORBEL - 25mm

ALL DIMENSIONS ARE IN MM

LEGENDS:

ERECTION MARK - 
MOULD FACE - 

CONTRACTOR -:

VME Precast Products

 Arihant Esta, 2g2, 2nd floor,
No.370, Church Road, Mogappair East,
Chennai-600037.
Tel:+91- 98400 - 41400 / 90802 - 22066

STRUCTURAL CONSULTANT -:

ES STRUCTURAL CONSULTANT

 B167, 12th cross street, Jawahar Nagar,
Palayamkottai, Tirunelveli-627007
Cell No: +91 9865803764

1	26-05-25	FOR APPROVAL	PK	PRC
0	21-04-25	FOR APPROVAL	PK	PRC
Rev	Date	Description	Chkd	Appd.

REVISION SCHEDULE

DRAWING TITLE -:

PW-GF-22-MOULD DRAWING

JOB NO. : ESP24075	DRAWN BY:- AR
ELEMENT NO. : PW-GF-22	SHEET SIZE:- A3
DWG. NO. : PW-GF-22(M2)	REV.NO:- 1
SCALE : As indicated	LEVEL. : GF