


5095

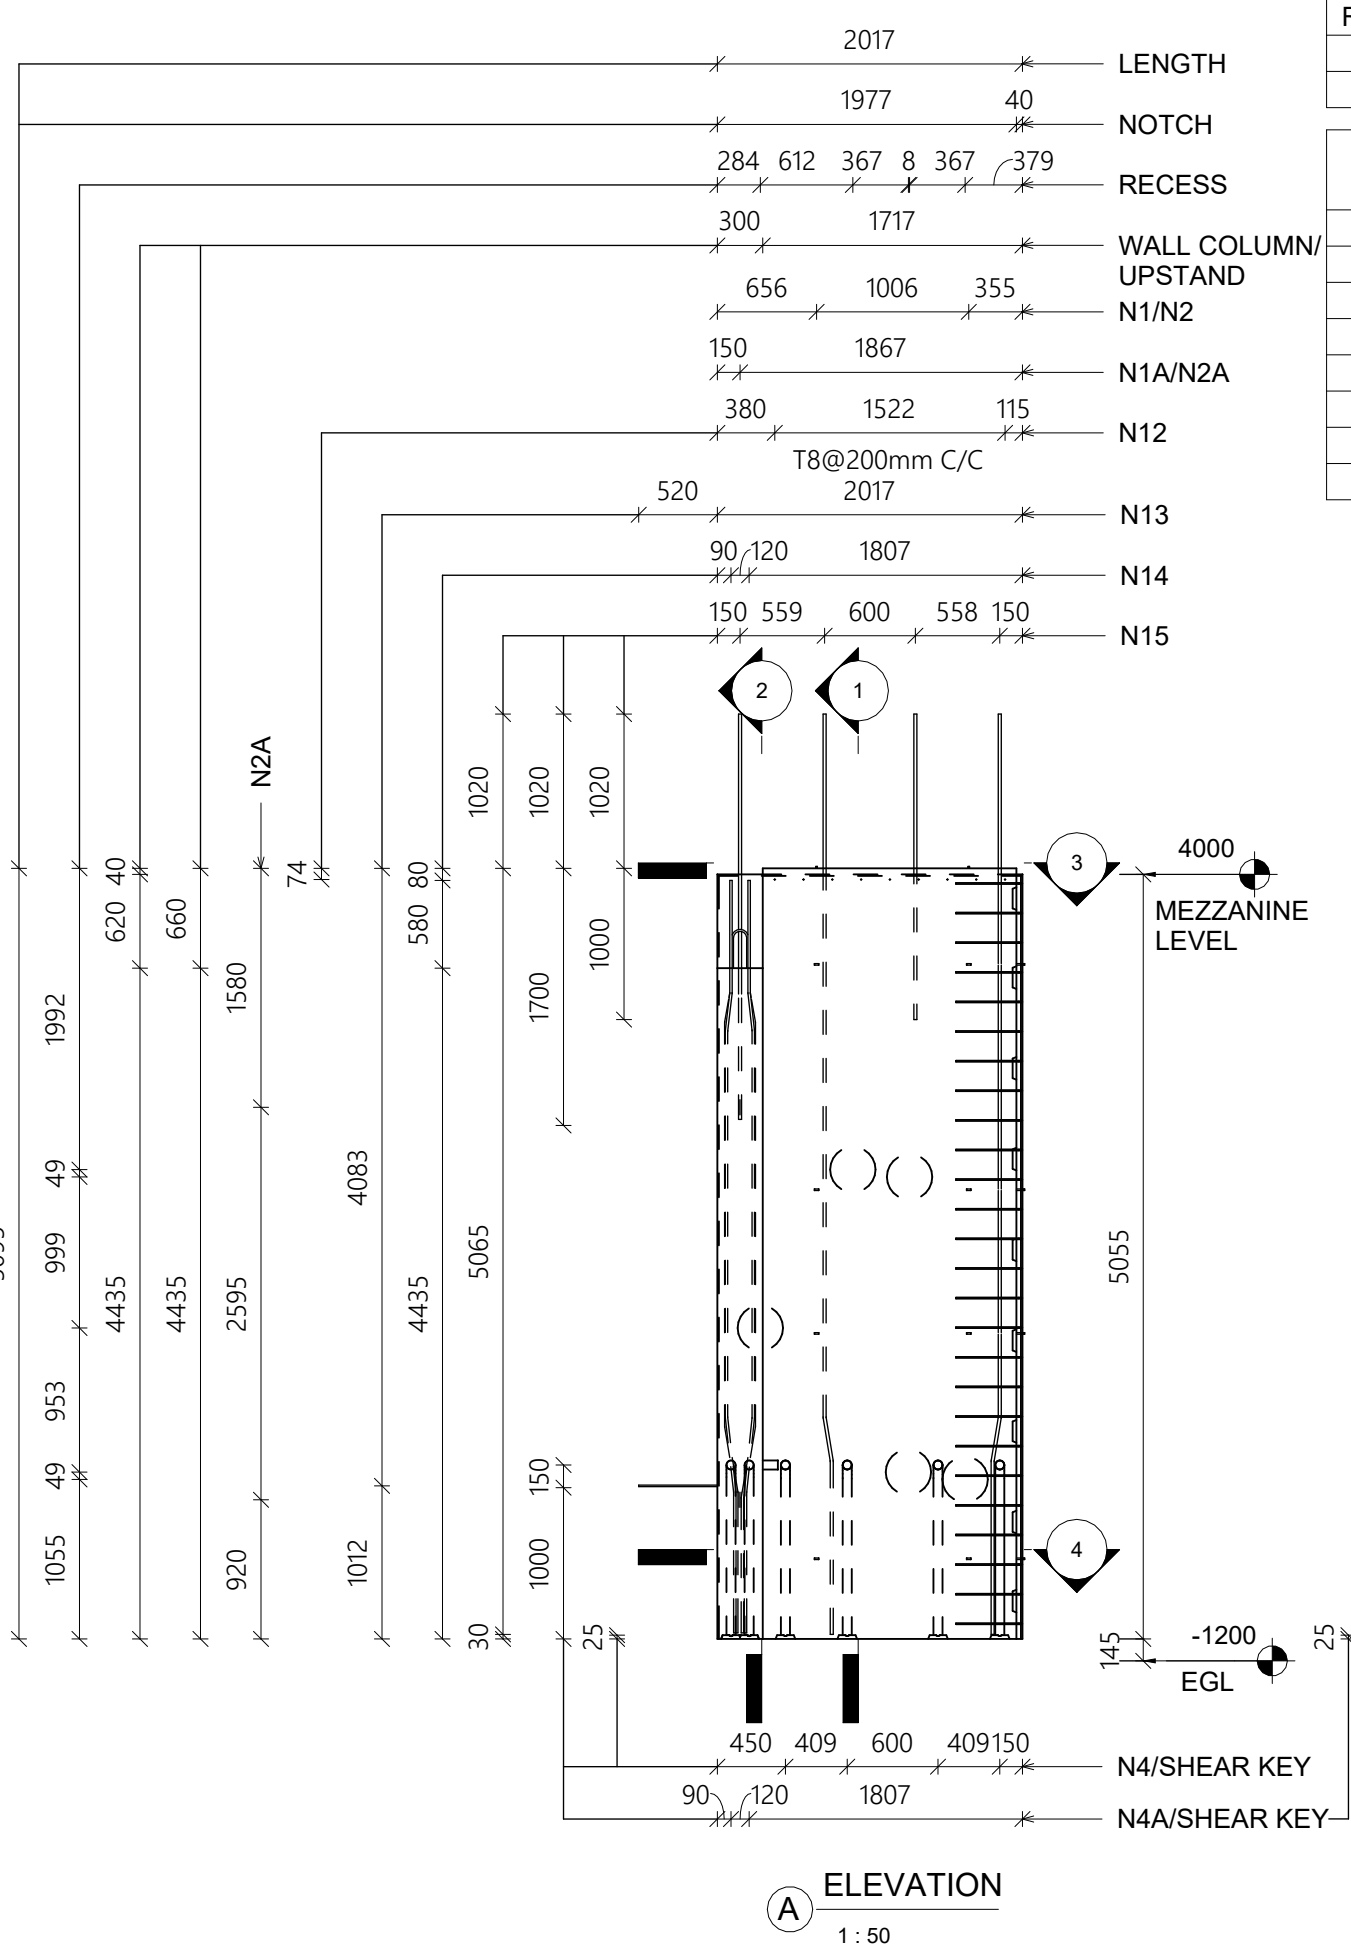


Dowel Bar Schedule		
Ref.No	Bar Diameter	Count
N14	16 mm	6
N15	20 mm	4

Insert Schedule		
Ref.No	Type	Count
N1	RR-SA-3.0-200	2
N1A	12.9Ø Lifting insert	1
N2	RR-SA-2.5-150	8
N2A	12.9Ø Lifting insert	2
N3	RR-SA-3.0-200	4
N4	60 mm dowel tube	4
N4A	60 mm dowel tube	6

Weight Schedule	
Volume	Weight
2.21 m³	5528.65 kg

Loop Bar Schedule		
Ref.No	Bar Diameter	Count
N11	8 mm	26

Projecting Bar Schedule		
Ref.No	Bar Diameter	Count
N12	8 mm	9
N13	10 mm	2

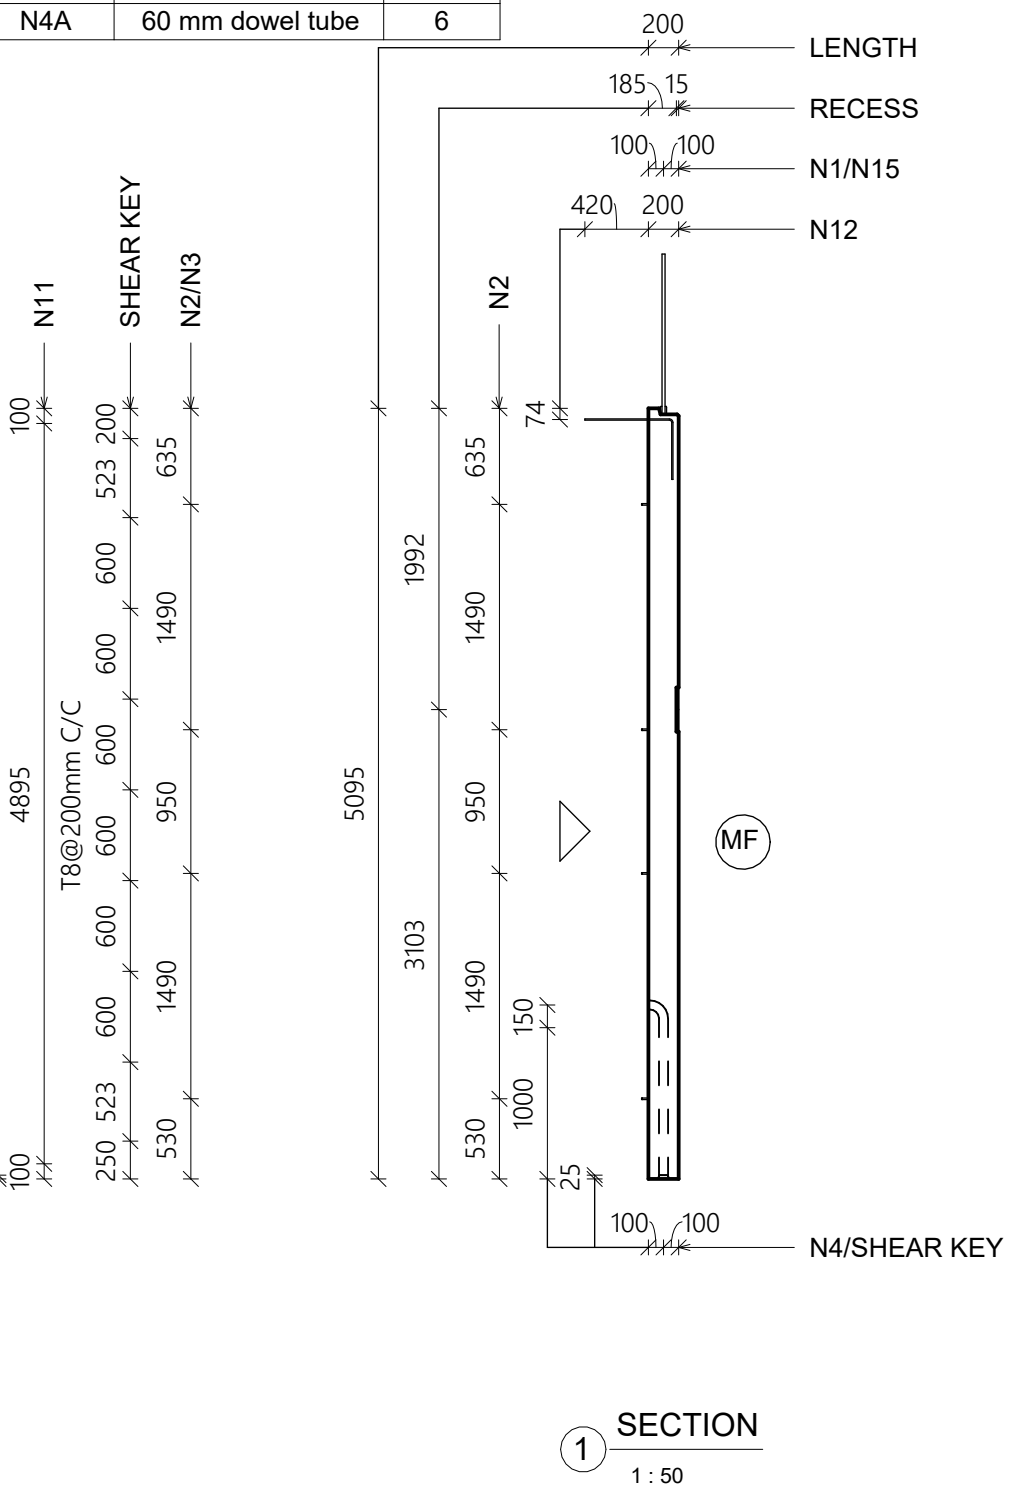

PROJECT -: MF FACTORY

- GENERAL NOTES:**
- GRADE OF CONCRETE - M40
 - GRADE OF STEEL - Fe500
 - STRIPPING STRENGTH - M20
- COVER**
- WALL - 30mm
 - CORBEL - 25mm
- ALL DIMENSIONS ARE IN MM

- LEGENDS:**
- ERECTION MARK -
 - MOULD FACE -

CONTRACTOR -:

VME Precast Products

 Arihant Esta, 2g2, 2nd floor,
No.370, Church Road, Mogappair East,
Chennai-600037.
Tel:+91- 98400 - 41400 / 90802 - 22066

STRUCTURAL CONSULTANT -:

 **ES STRUCTURAL CONSULTANT**
B167, 12th cross street, Jawahar Nagar,
Palayamkottai, Tirunelveli-627007
Cell No: +91 9865803764

0	26-05-25	FOR APPROVAL	PK	PRC
Rev	Date	Description	Chkd	Appd.
REVISION SCHEDULE				
DRAWING TITLE -:				
PW-GF-24-MOULD DRAWING				
JOB NO. : ESP24075			DRAWN BY:- IH	
ELEMENT NO. : PW-GF-24			SHEET SIZE:- A3	
DWG. NO. : PW-GF-24(M1)			REV.NO:- 0	
SCALE : 1 : 50			LEVEL. :	