




400 LENGTH
385 15 RECESS
350 50 UPSTAND
400 WALL COLUMN
200 200 N1A/N2A
90 110 90 N13
300 100 N14

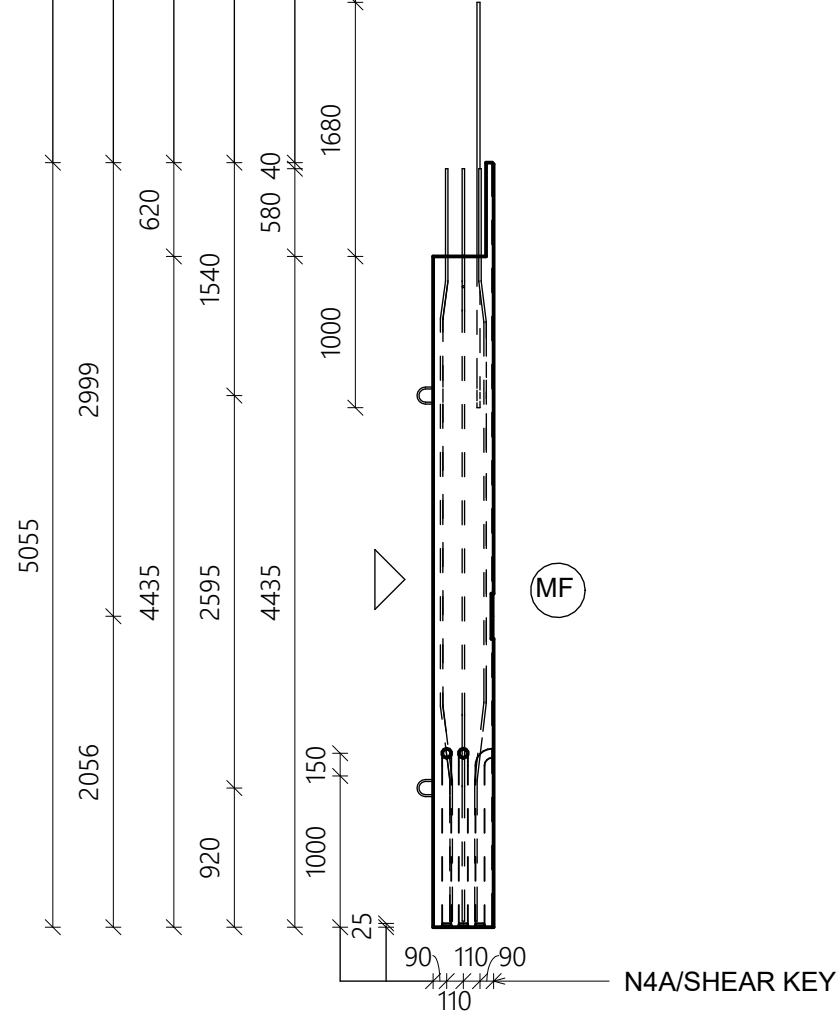


2 SECTION
1 : 50

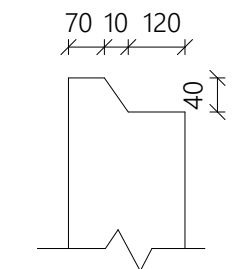

TOP NOTCH DETAIL




TYPICAL CHAMFER DETAIL

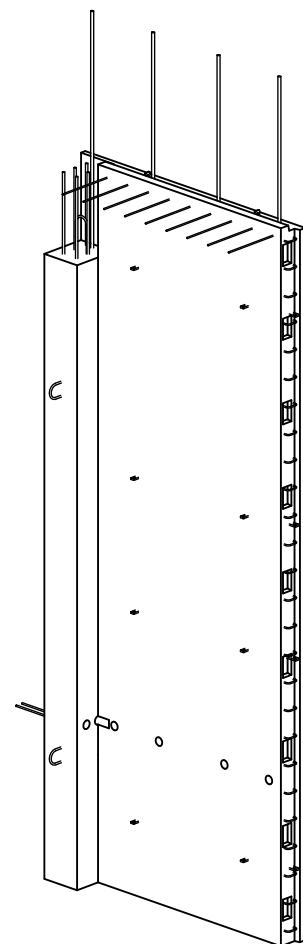


5 3D VIEW


NOTE: FOR REINFORCEMENT DETAILS
REFER PW-GF-25

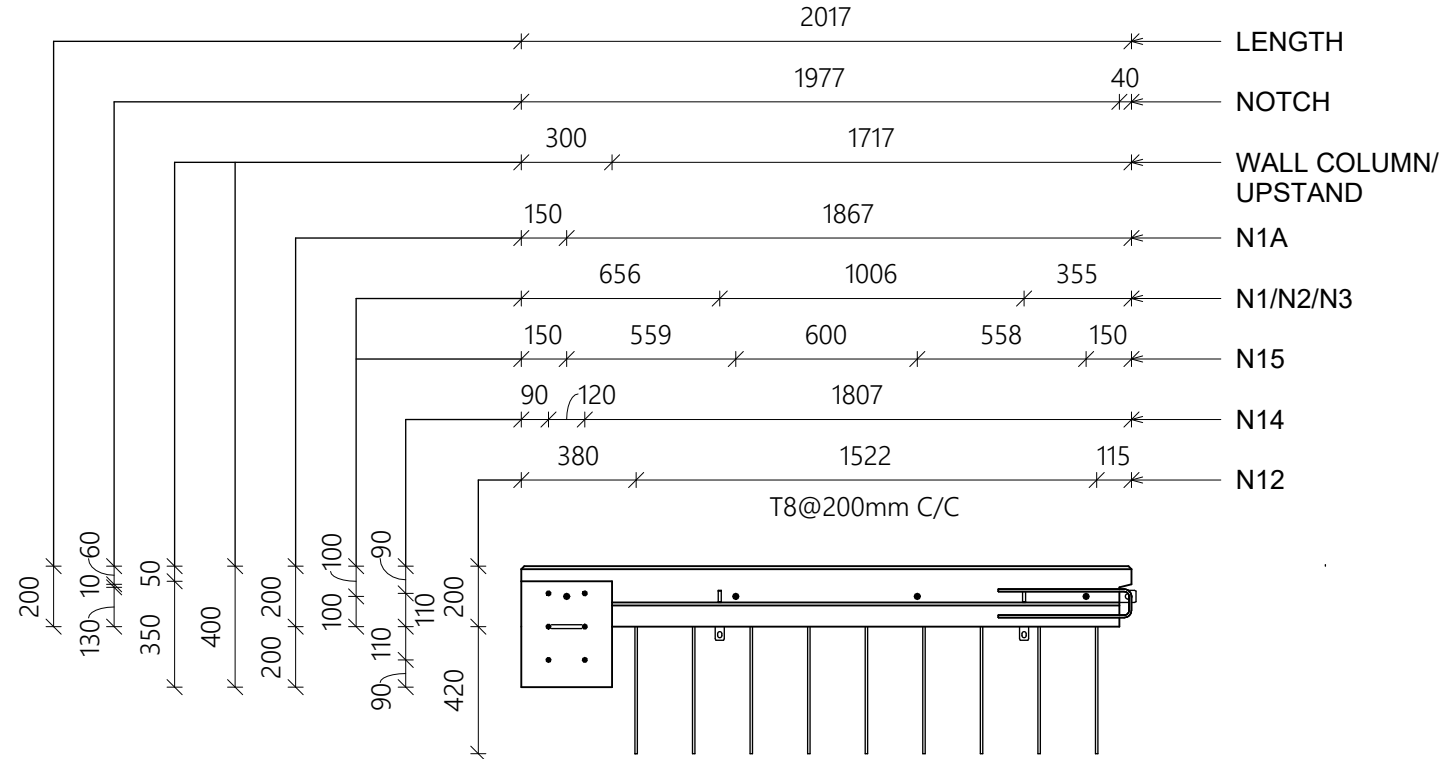


3 SECTION
1 : 25

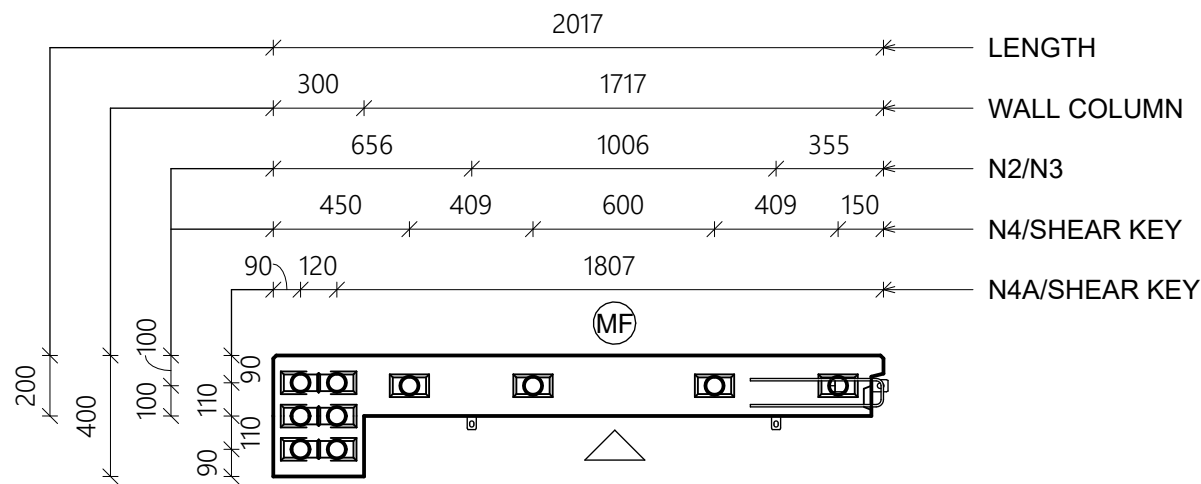


4 SECTION
1 : 25

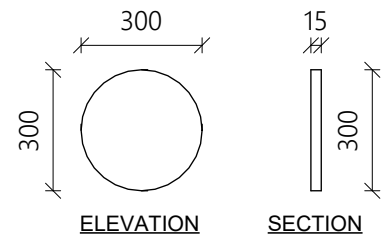

RECESS DETAIL

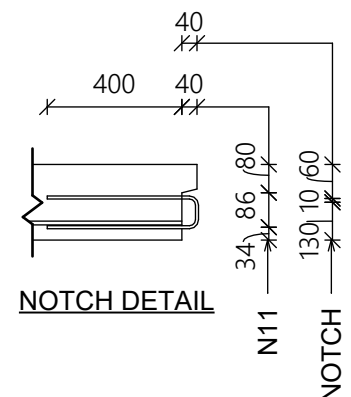

NOTCH DETAIL

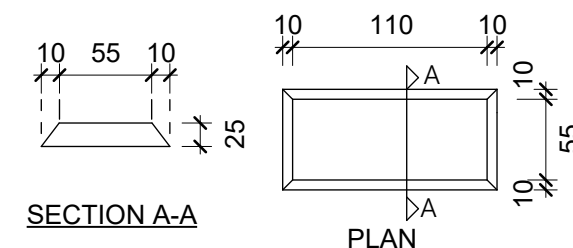

SECTION A-A

PLAN

TYPICAL SHEAR KEY DETAIL

PROJECT :-
MF FACTORY

GENERAL NOTES:

GRADE OF CONCRETE - M40
GRADE OF STEEL - Fe500
STRIPPING STRENGTH - M20

COVER
WALL - 30mm
CORBEL - 25mm

ALL DIMENSIONS ARE IN MM

LEGENDS:
ERECTION MARK -
MOULD FACE -

CONTRACTOR :-
VME Precast Products
Arihant Esta, 2g2, 2nd floor,
No.370, Church Road, Mogappair East,
Chennai-600037.
Tel:+91- 98400 - 41400 / 90802 - 22066

STRUCTURAL CONSULTANT :-
ES STRUCTURAL CONSULTANT
B167, 12th cross street, Jawahar Nagar,
Palayamkottai, Tirunelveli-627007
Cell No: +91 9865803764

0	26-05-25	FOR APPROVAL	PK	PRC
Rev	Date	Description	Chkd	Appd.
REVISION SCHEDULE				

DRAWING TITLE :-
PW-GF-24-MOULD DRAWING

JOB NO. : ESP24075	DRAWN BY:- IH
ELEMENT NO. : PW-GF-24	SHEET SIZE:- A3
DWG. NO. : PW-GF-24(M2)	REV.NO:- 0
SCALE : As indicated	LEVEL. :