
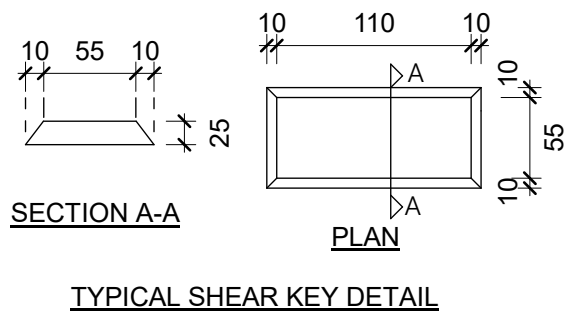
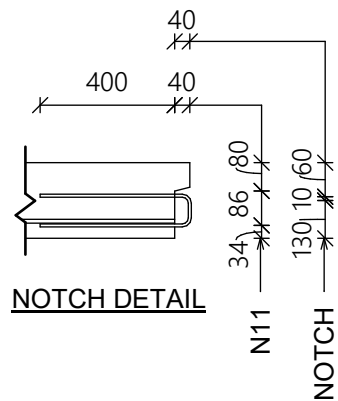
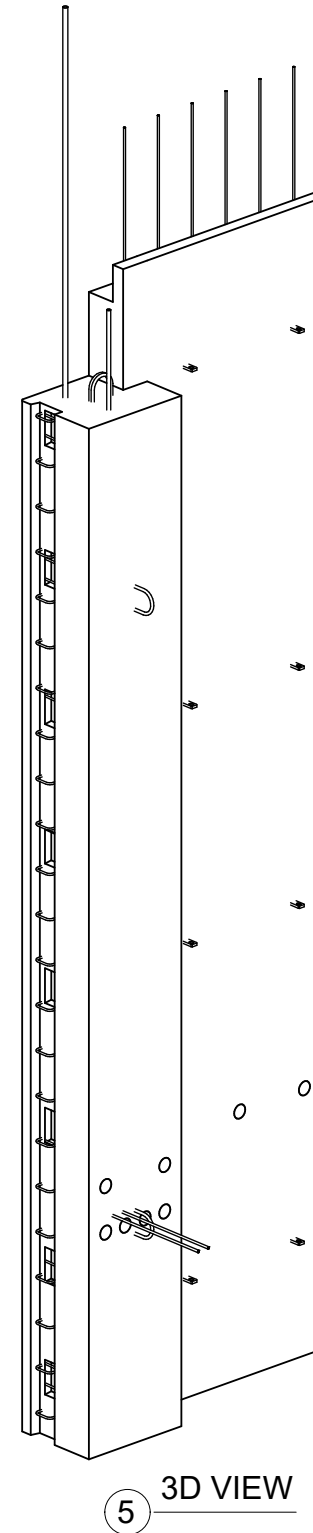
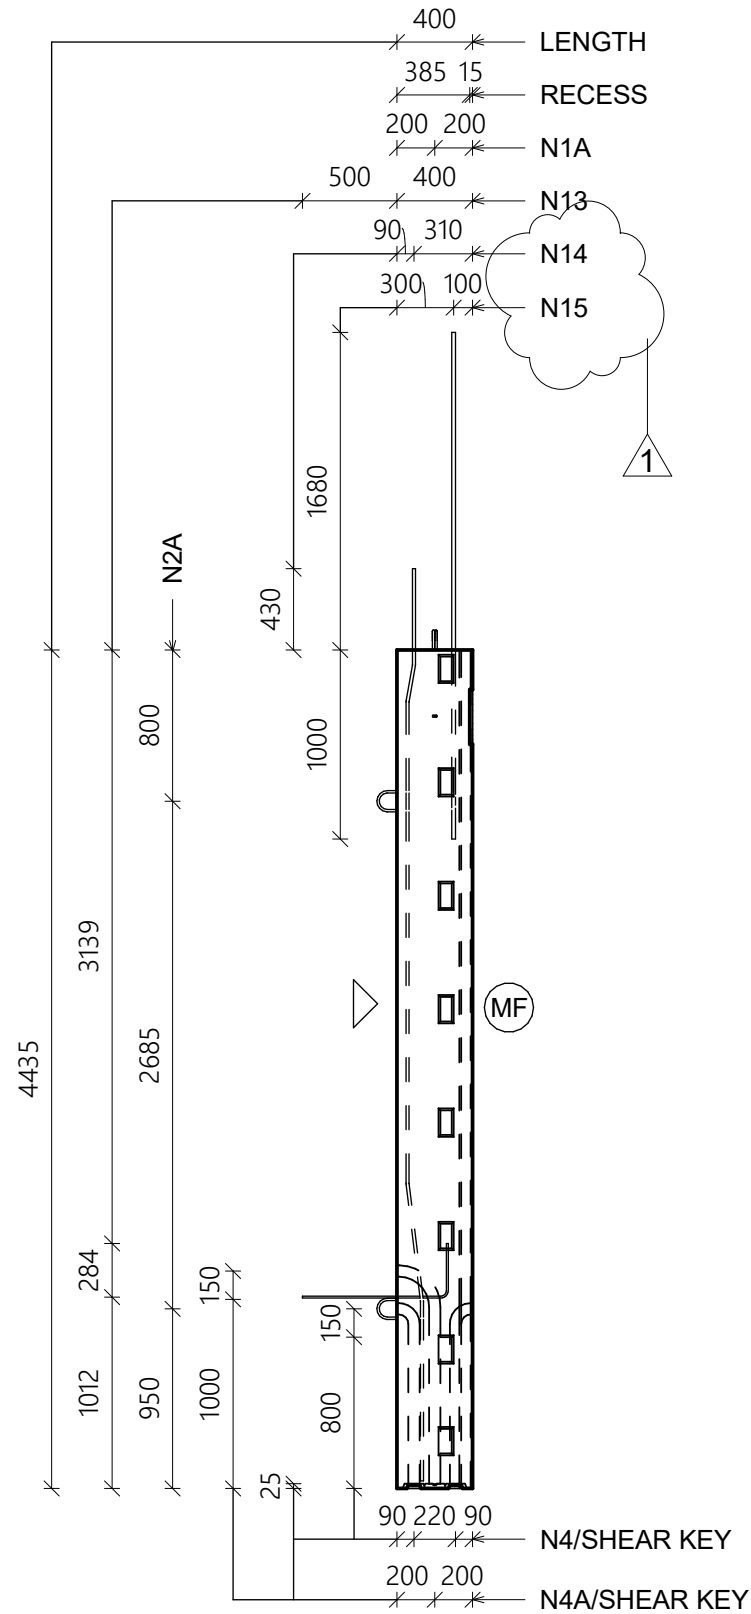
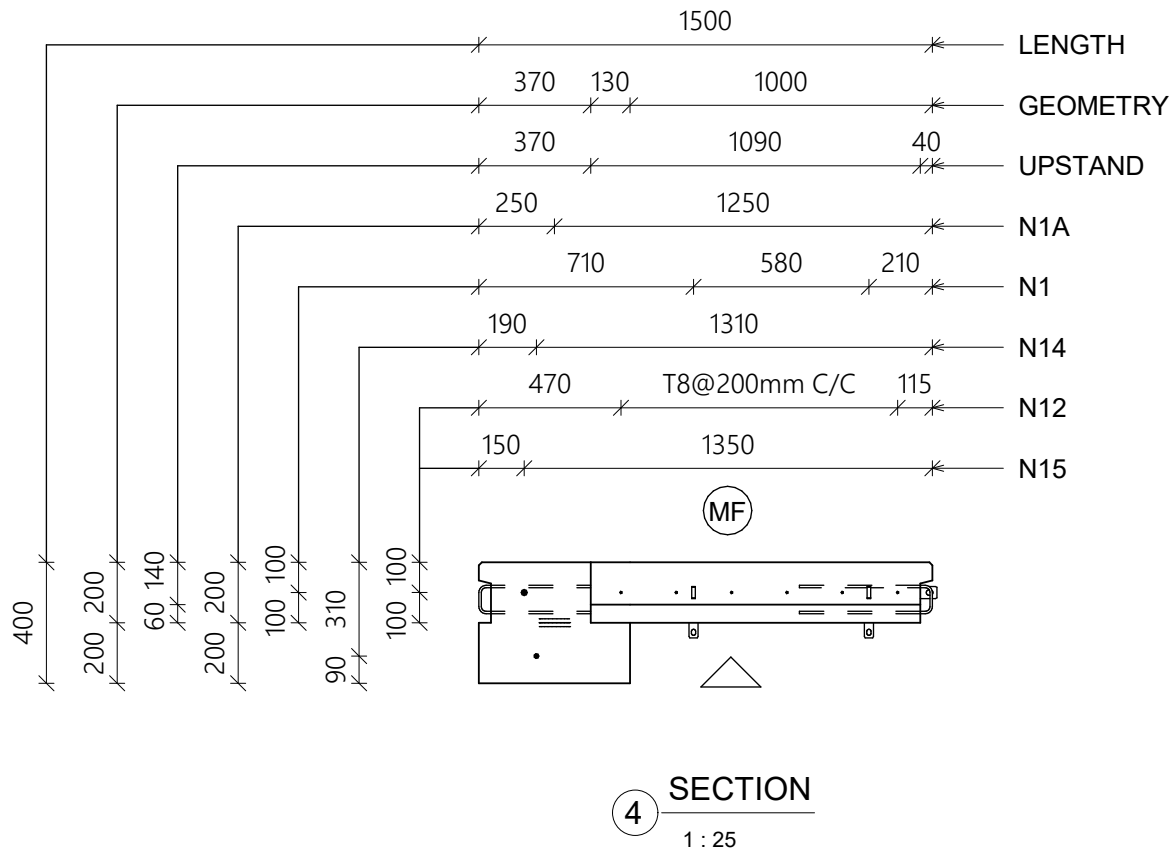


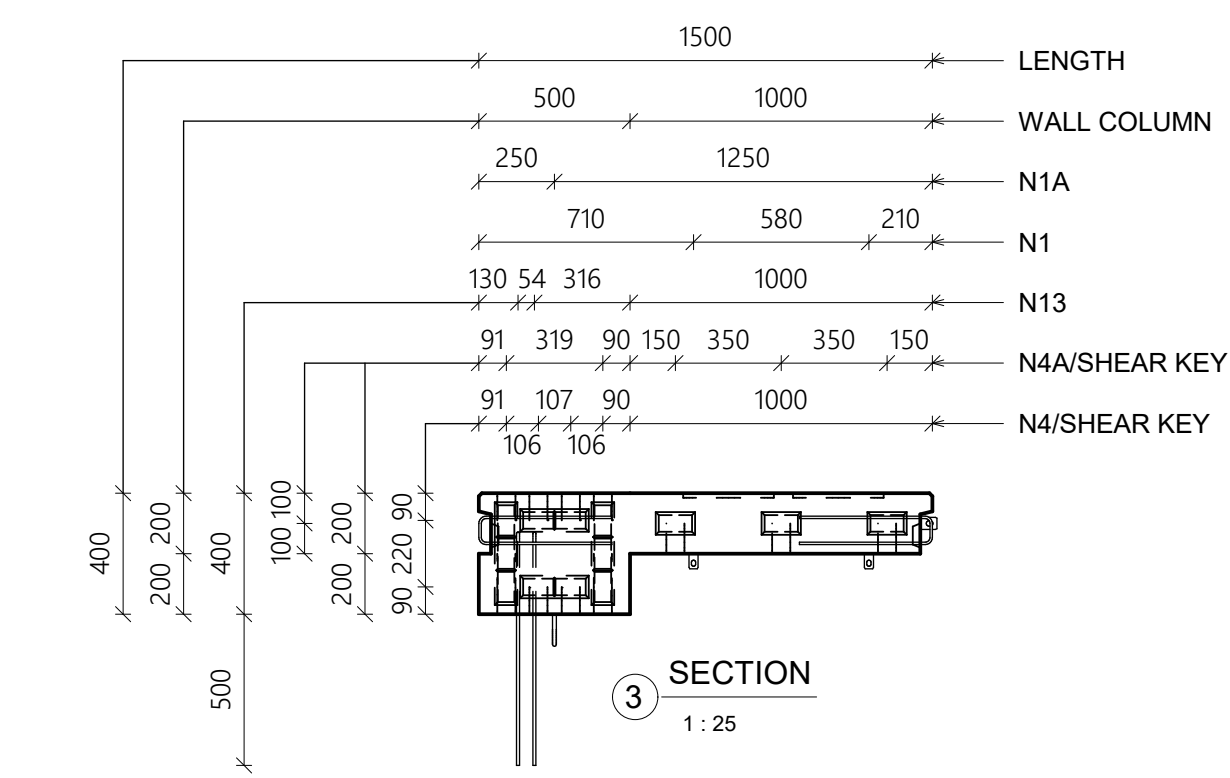

Projecting Bar Schedule		
Ref.No	Bar Diameter	Quantity
N11	8 mm	48
N12	8 mm	6

Dowel Bar Schedule		
Ref.No	Bar Diameter	Count
N14	16 mm	2

Weight Schedule	
Volume	Weight
1.76 m ³	4411.03 kg

Protruding Bar Schedule		
Ref.No	Bar Diameter	Quantity
N13	10 mm	2

Insert Schedule		
Ref No.	Type	Count
N1	RR-SA-4.0-240	2
N1A	12.9Ø Lifting insert	1
N2	RR-SA-2.5-150	8
N2A	12.9Ø Lifting insert	2
N3	RR-SA-3.0-200	4
N4	60 mm dowel tube	8
N4A	60 mm dowel tube	5

PROJECT -: MF FACTORY

GENERAL NOTES:

GRADE OF CONCRETE	- M40
GRADE OF STEEL	- Fe500
STRIPPING STRENGTH	- M20

COVER

WALL	- 30mm
COLUMN	- 40mm

ALL DIMENSIONS ARE IN MM

LEGENDS:

ERECTION MARK	-	
MOULD FACE	-	

CONTRACTOR -:

VME Precast Products

Arihant Esta, 2g2, 2nd floor,
No.370, Church Road, Mogappair East,
Chennai-600037.
Tel:+91- 98400 - 41400 / 90802 - 22066

STRUCTURAL CONSULTANT -:

ES STRUCTURAL CONSULTANT
B167, 12th cross street, Jawahar Nagar,
Palayamkottai, Tirunelveli-627007
Cell No: +91 9865803764

1	02-06-25	REVISED AS PER COULDED	PK	PRC
0	26-05-25	FOR APPROVAL	PK	PRC
Rev	Date	Description	Chkd	Appd.

REVISION SCHEDULE

DRAWING TITLE -:

PW-GF-27-MOULD DRAWING

JOB NO. : ESP24075	DRAWN BY:- AR
ELEMENT NO. : PW-GF-27	SHEET SIZE:- A3
DWG. NO. : PW-GF-27(M2)	REV.NO:- 1
SCALE : As indicated	LEVEL. : GF