

PROJECT -:
MF FACTORY

GENERAL NOTES:

GRADE OF CONCRETE	- M40
GRADE OF STEEL	- Fe500
STRIPPING STRENGTH	- M20

COVER

WALL	- 30mm
CORBEL	- 25mm

ALL DIMENSIONS ARE IN MM

LEGENDS:

ERECTION MARK	-	
MOULD FACE	-	

CONTRACTOR -:

VME Precast Products

VME
precast products

Arihant Esta, 2g2, 2nd floor,
No.370, Church Road, Mogappair East,
Chennai-600037.
Tel:+91- 98400 - 41400 / 90802 - 22066

STRUCTURAL CONSULTANT -:

ES STRUCTURAL CONSULTANT
 B167, 12th cross street, Jawahar Nagar,
 Palayamkottai, Tirunelveli-627007
 Cell No: +91 9865803764



1	26-05-25	FOR APPROVAL	PK	PRC
0	21-04-25	FOR APPROVAL	PK	PRC
Rev	Date	Description	Chkd	Appd.

REVISION SCHEDULE


DRAWING TITLE :-

PW-GF-31-MOULD DRAWING


JOB NO. : ESP24075	DRAWN BY:- AR
ELEMENT NO. : PW-GF-31	SHEET SIZE:- A3
DWG. NO. : PW-GF-31(M2)	REV.NO:- 1
SCALE : As indicated	LEVEL. : GF

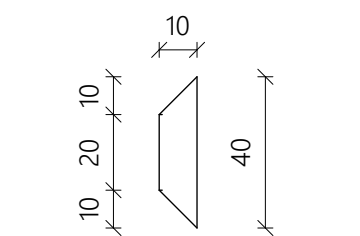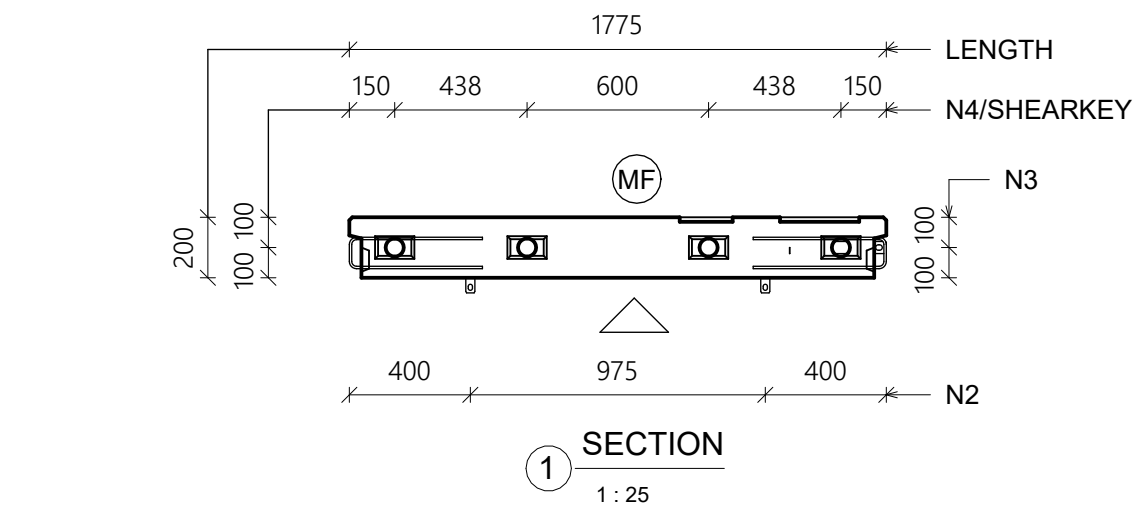

TYPICAL GROOVE DETAIL

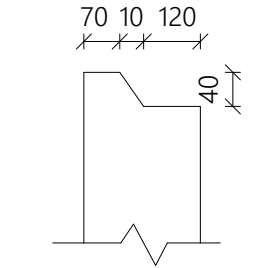

TOP NOTCH DETAIL



TYPICAL CHAMFER DETAIL

NOTE: FOR REINFORCEMENT DETAILS
REFER PW-GF-30



Weight Schedule	
Volume	Weight
3.18 m ³	7961.38 kg

Insert Schedule		
Ref No.	Type	Count
N1	RR-SA-7.5-260	2
N2	RR-SA-2.5-150	8
N3	RR-SA-4.0-320	4
N4	60 mm dowel tube	4

Projecting Bar Schedule		
Ref.No	Bar Diameter	Quantity
N12	8 mm	9

Dowel Bar Schedule		
Ref.No	Bar Diameter	Quantity
N15	20 mm	2


U Bar Schedule		
Ref.No	Bar Diameter	Quantity
N11	8 mm	92

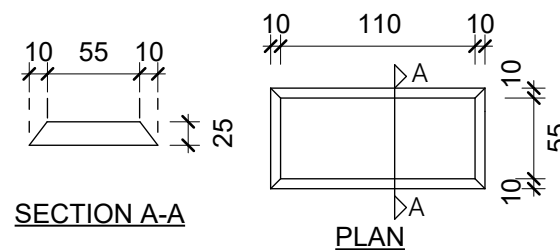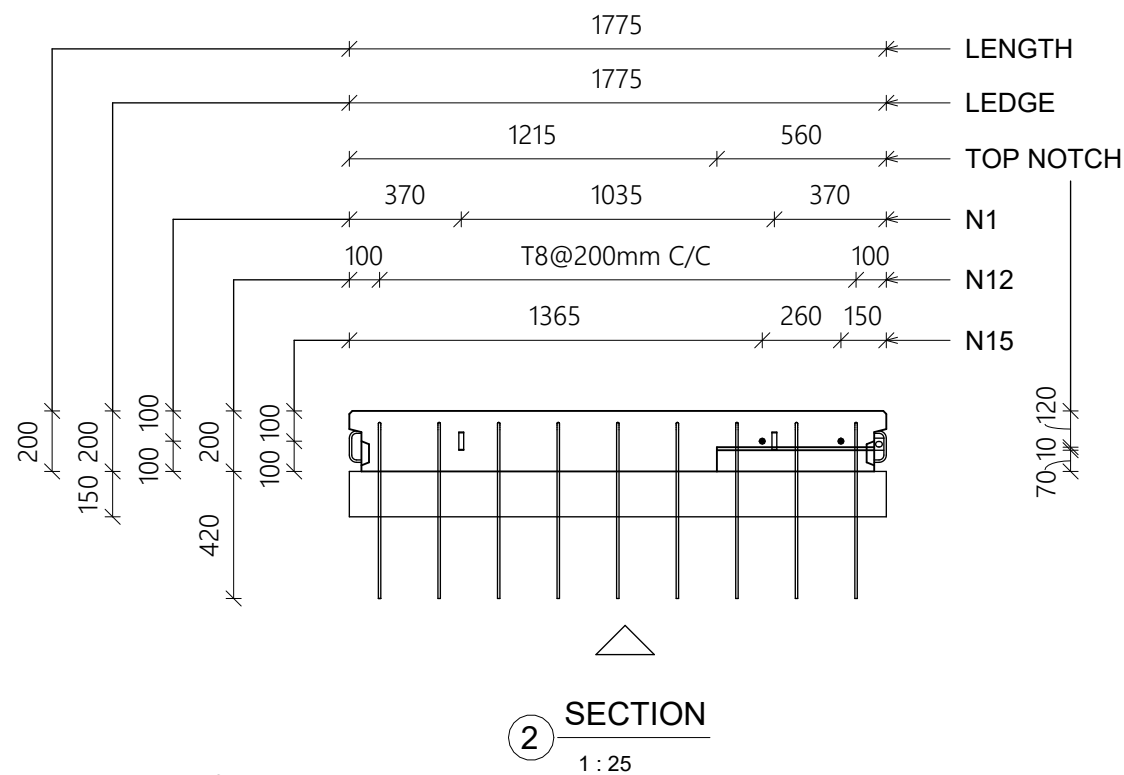

SECTION A-A


PLAN

TYPICAL SHEAR KEY DETAIL

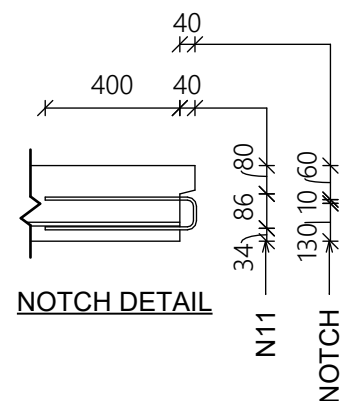


NOTCH DETAIL

NOTCH

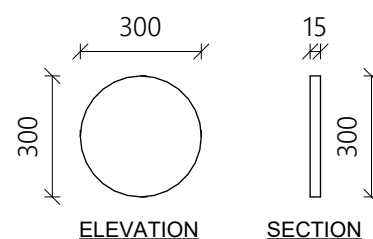ELEVATION

SECTION

RECESS DETAIL

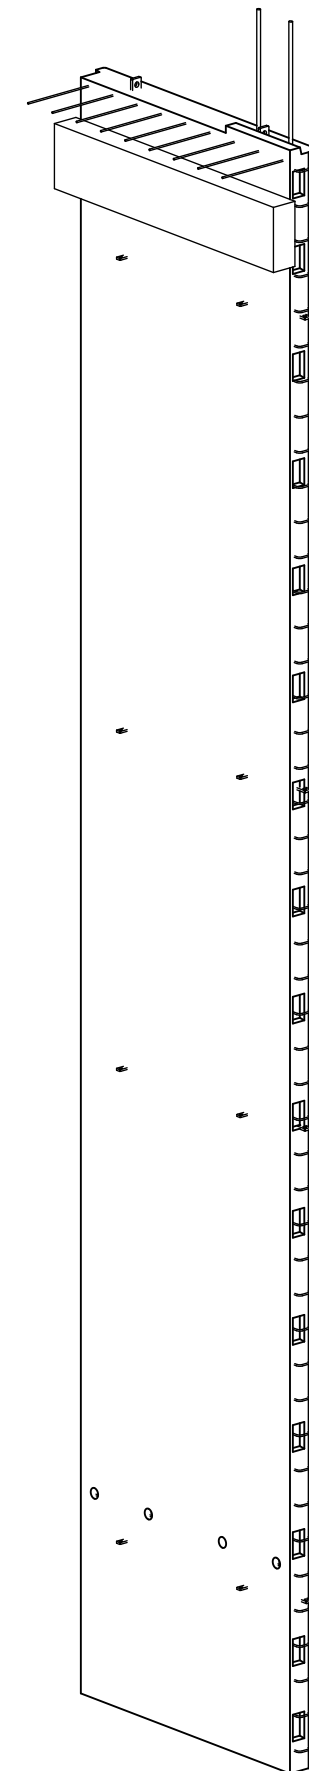

② 3D VIEW